US008582598B2

(12) **United States Patent**
Binder

(10) **Patent No.: US 8,582,598 B2**
(45) **Date of Patent: *Nov. 12, 2013**

(54) **LOCAL AREA NETWORK FOR DISTRIBUTING DATA COMMUNICATION, SENSING AND CONTROL SIGNALS**

(75) Inventor: **Yehuda Binder**, Hod Ha'sharon (IL)

(73) Assignee: **Mosaid Technologies Incorporated**, Ottawa, Ontario (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **13/351,874**

(22) Filed: **Jan. 17, 2012**

(65) **Prior Publication Data**

US 2012/0185908 A1 Jul. 19, 2012

Related U.S. Application Data

(60) Continuation of application No. 11/438,259, filed on May 23, 2006, now Pat. No. 8,121,132, which is a division of application No. 11/190,884, filed on Jul. 28, 2005, now Pat. No. 7,200,152, which is a continuation of application No. 09/349,020, filed on Jul. 7, 1999, now Pat. No. 6,956,826.

(51) **Int. Cl.**
H04L 12/40 (2006.01)

(52) **U.S. Cl.**
USPC **370/463**; 370/503; 725/127

(58) **Field of Classification Search**
USPC 370/200, 222–224, 254, 258, 293, 400, 370/404–406, 424, 452–456, 460, 463, 502, 370/503; 340/3.42–3.44; 379/107; 710/413; 725/127
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

404,721	A	6/1889	Messer
405,422	A	6/1889	Law et al.
2,298,435	A	10/1942	Tunick
2,680,162	A	6/1954	Brehm et al.
3,370,125	A	2/1968	Shaw et al.
3,539,727	A	11/1970	Pasternack
3,541,541	A	11/1970	Engelbart
3,659,277	A	4/1972	Brown
3,699,523	A	10/1972	Percher
3,702,460	A	11/1972	Blose

(Continued)

FOREIGN PATENT DOCUMENTS

WO 0105092 1/2001

OTHER PUBLICATIONS

Wakerly, John, The Simple, Definitive Backplane and Timeslot Explanation; D.A.V.I.D. Systems, Inc., pp. 1-8, Sep. 1, 1984.

(Continued)

Primary Examiner — Edwin Holloway, III
(74) *Attorney, Agent, or Firm* — Browdy and Neimark, PLLC

(57) **ABSTRACT**

A network for carrying out control, sensing and data communications, composed of a plurality of nodes. Each node may be connected to a payload, which includes sensors, actuators and DTE's. The network is formed using a plurality of independent communication links, each based on electrically-conducting communication media composed of at least two conductors and interconnecting two nodes, in a point-to-point configuration. During network operation, nodes can be dynamically configured as either data-generating nodes, wherein data is generated and transmitted into the network, or as receiver/repeater/router nodes, wherein received data is repeated from a receiver port to all output ports.

56 Claims, 8 Drawing Sheets

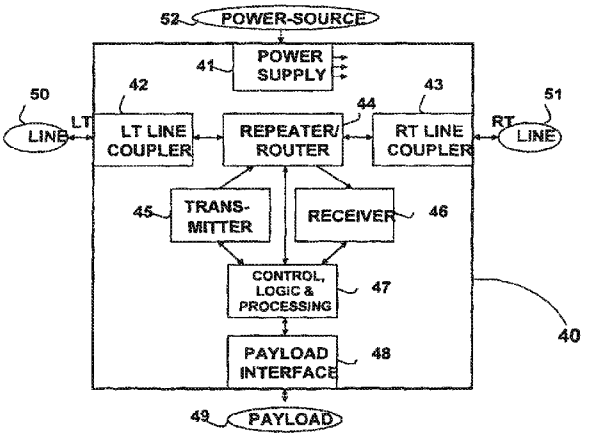

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,717,858 A 2/1973 Hadden
3,739,226 A 6/1973 Seiter et al.
3,805,265 A 4/1974 Lester
3,806,814 A 4/1974 Forbes
3,835,334 A 9/1974 Notteau
3,836,888 A 9/1974 Boenke et al.
3,870,822 A 3/1975 Matthews
3,872,319 A 3/1975 Platzer, Jr.
3,922,490 A 11/1975 Pettis
3,924,077 A 12/1975 Blakeslee
3,959,772 A 5/1976 Wakasa et al.
3,968,333 A 7/1976 Simokat et al.
3,975,594 A 8/1976 Guntersdorfer
4,012,734 A 3/1977 Jagoda et al.
4,058,678 A 11/1977 Dunn et al.
4,063,220 A 12/1977 Metcalfe et al.
4,173,714 A 11/1979 Bloch et al.
4,197,431 A 4/1980 Vis
4,232,200 A 11/1980 Hestad et al.
4,241,243 A 12/1980 Ball
4,254,305 A 3/1981 Treiber
4,272,759 A 6/1981 Handy
4,303,912 A 12/1981 Stafford et al.
4,303,993 A 12/1981 Panepinto, Jr. et al.
4,330,687 A 5/1982 Foulkes et al.
4,335,464 A 6/1982 Armstrong et al.
4,339,750 A 7/1982 Delacruz
4,339,816 A 7/1982 Reed
4,367,557 A 1/1983 Stern et al.
4,373,117 A 2/1983 Pierce
4,381,427 A 4/1983 Cheal et al.
4,389,694 A 6/1983 Cornwell, Jr.
4,390,986 A 6/1983 Moses
4,395,590 A 7/1983 Pierce et al.
4,413,229 A 11/1983 Grant
4,415,774 A 11/1983 Driver
4,417,099 A 11/1983 Pierce
4,417,242 A 11/1983 Bapst et al.
4,431,869 A 2/1984 Sweet
4,463,341 A 7/1984 Iwasaki
4,467,314 A 8/1984 Weikel et al.
4,477,896 A 10/1984 Aker
4,484,185 A 11/1984 Graves
4,490,683 A 12/1984 Rhee
4,493,092 A 1/1985 Adams
4,507,721 A 3/1985 Yamano et al.
4,507,793 A 3/1985 Adams
4,509,211 A 4/1985 Robbins
4,510,493 A 4/1985 Bux et al.
4,523,307 A 6/1985 Brown et al.
4,534,039 A 8/1985 Dodds et al.
4,535,401 A 8/1985 Penn
4,543,450 A 9/1985 Brandt
4,551,721 A 11/1985 Kozlik
4,578,533 A 3/1986 Pierce
4,578,537 A 3/1986 Faggin et al.
4,580,276 A 4/1986 Andruzzi, Jr. et al.
4,583,214 A 4/1986 Miyashita et al.
4,592,069 A 5/1986 Redding
4,593,389 A 6/1986 Wurzburg et al.
4,621,170 A 11/1986 Picandet
4,633,217 A 12/1986 Akano
4,636,914 A 1/1987 Belli
4,637,013 A * 1/1987 Nakamura 370/221
4,639,714 A 1/1987 Crowe
4,642,607 A 2/1987 Strom et al.
4,647,725 A 3/1987 Dellinger et al.
4,651,022 A 3/1987 Cowley
4,661,952 A 4/1987 Von Sichart et al.
4,665,544 A 5/1987 Honda et al.
4,669,916 A 6/1987 White et al.
4,670,874 A 6/1987 Sato et al.
4,672,605 A 6/1987 Hustig et al.
4,677,646 A 6/1987 Dodds et al.
4,691,344 A 9/1987 Brown et al.
4,710,917 A * 12/1987 Tompkins et al. 709/204
4,714,912 A 12/1987 Roberts et al.
4,719,616 A 1/1988 Akano
4,724,435 A 2/1988 Moses et al.
4,733,380 A 3/1988 Havira
4,733,389 A 3/1988 Puvogel
4,734,919 A 3/1988 Tae
4,734,932 A 3/1988 Lott
4,736,367 A 4/1988 Wroblewski et al.
4,740,963 A 4/1988 Eckley
4,742,538 A 5/1988 Szlam
4,745,391 A 5/1988 Gajjar
4,750,094 A 6/1988 Krasik
4,755,792 A 7/1988 Pezzolo et al.
4,761,646 A 8/1988 Choquet et al.
4,766,402 A 8/1988 Crane
4,772,870 A 9/1988 Reyes
4,780,714 A 10/1988 Moustakas et al.
4,782,322 A 11/1988 Lechner et al.
4,785,448 A 11/1988 Reichert et al.
4,787,082 A 11/1988 Delaney et al.
4,788,527 A 11/1988 Johansson
4,799,211 A 1/1989 Felker et al.
4,803,719 A 2/1989 Ulrich
4,806,905 A 2/1989 McGowan, III et al.
4,807,225 A 2/1989 Fitch
4,809,296 A 2/1989 Braun et al.
4,809,339 A 2/1989 Shih et al.
4,813,066 A 3/1989 Holtz et al.
4,814,941 A 3/1989 Speet et al.
4,815,106 A 3/1989 Propp et al.
4,821,319 A 4/1989 Middleton et al.
4,825,349 A 4/1989 Marcel
4,852,151 A 7/1989 Dittakavi et al.
4,866,602 A 9/1989 Hall
4,866,757 A 9/1989 Nilssen
4,872,197 A 10/1989 Pemmaraju
4,890,102 A 12/1989 Oliver
4,896,349 A 1/1990 Kubo et al.
4,899,131 A 2/1990 Wilk et al.
4,901,218 A 2/1990 Cornwell
4,903,292 A 2/1990 Dillon
4,914,688 A 4/1990 Kobayashi et al.
4,918,688 A 4/1990 Krause et al.
4,922,503 A 5/1990 Leone
4,924,349 A 5/1990 Buehler et al.
4,924,492 A 5/1990 Gitlin et al.
4,926,158 A 5/1990 Zeigler
4,939,728 A 7/1990 Markkula, Jr. et al.
4,947,484 A 8/1990 Twitty et al.
4,953,055 A 8/1990 Douhet et al.
4,955,018 A 9/1990 Twitty et al.
4,969,147 A 11/1990 Markkula, Jr. et al.
4,973,954 A 11/1990 Schwarz
4,975,903 A 12/1990 Wakerly et al.
4,979,183 A 12/1990 Cowart
4,991,221 A 2/1991 Rush
4,992,774 A 2/1991 McCullough
5,001,774 A 3/1991 Lee
5,003,457 A 3/1991 Ikei et al.
5,010,399 A 4/1991 Goodman et al.
5,014,308 A 5/1991 Fox
5,018,138 A 5/1991 Twitty et al.
5,021,779 A 6/1991 Bisak
5,025,443 A 6/1991 Gupta
5,032,819 A 7/1991 Sakuragi et al.
5,033,062 A 7/1991 Morrow et al.
5,033,112 A 7/1991 Bowling et al.
5,034,531 A 7/1991 Friary et al.
5,034,882 A 7/1991 Eisenhard et al.
5,034,883 A 7/1991 Donaldson et al.
5,034,948 A 7/1991 Mizutani et al.
5,063,563 A 11/1991 Ikeda et al.
5,065,133 A 11/1991 Howard
5,068,890 A 11/1991 Nilssen
5,089,927 A 2/1992 Bulan et al.
5,089,974 A 2/1992 Demeyer et al.
5,111,497 A 5/1992 Bliven et al.
5,113,498 A 5/1992 Evan et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,114,365 A 5/1992 Thompson et al.
5,121,482 A 6/1992 Patton
5,125,026 A 6/1992 Holcombe
5,125,077 A 6/1992 Hall
5,136,580 A 8/1992 Videlock et al.
5,144,544 A 9/1992 Jenneve et al.
5,146,471 A 9/1992 Cowart et al.
5,148,144 A 9/1992 Sutterlin et al.
5,150,365 A 9/1992 Hirata et al.
5,157,711 A 10/1992 Shimanuki
5,175,764 A 12/1992 Patel et al.
5,179,586 A 1/1993 Lee
5,181,240 A 1/1993 Sakuragi et al.
5,192,231 A 3/1993 Dolin, Jr.
5,210,518 A 5/1993 Graham et al.
5,210,519 A 5/1993 Moore
5,210,788 A 5/1993 Nilssen
5,216,704 A 6/1993 Williams et al.
5,220,561 A 6/1993 Nuhn et al.
5,220,597 A 6/1993 Horiuchi
5,224,154 A 6/1993 Aldridge et al.
5,241,283 A 8/1993 Sutterlin
5,247,347 A 9/1993 Litteral et al.
5,255,267 A 10/1993 Hansen et al.
5,257,006 A 10/1993 Graham et al.
5,265,154 A 11/1993 Schotz
5,268,676 A 12/1993 Asprey et al.
5,274,631 A 12/1993 Bhardwaj
5,283,825 A 2/1994 Druckman et al.
5,285,477 A 2/1994 Leonowich
5,289,359 A 2/1994 Ziermann
5,289,461 A 2/1994 De Nijs
5,289,476 A 2/1994 Johnson et al.
5,297,141 A 3/1994 Marum
5,311,114 A 5/1994 Sambamurthy et al.
5,311,518 A 5/1994 Takato et al.
5,311,593 A 5/1994 Carmi
5,319,571 A 6/1994 Langer et al.
5,323,461 A 6/1994 Rosenbaum et al.
5,341,370 A 8/1994 Nuhn et al.
5,341,415 A 8/1994 Baran
5,343,240 A 8/1994 Yu
5,343,514 A 8/1994 Snyder
5,345,437 A 9/1994 Ogawa
5,347,549 A 9/1994 Baumann et al.
5,351,272 A 9/1994 Abraham
5,353,409 A 10/1994 Asprey et al.
5,355,114 A 10/1994 Sutterlin et al.
5,356,311 A 10/1994 Liu
5,368,041 A 11/1994 Shambroom
5,375,051 A 12/1994 Decker et al.
5,381,462 A 1/1995 Larson et al.
5,381,804 A 1/1995 Shambroom
5,391,932 A 2/1995 Small et al.
5,396,636 A 3/1995 Gallagher et al.
5,400,068 A 3/1995 Ishida et al.
5,402,902 A 4/1995 Bouley
5,404,127 A 4/1995 Lee et al.
5,406,249 A 4/1995 Pettus
5,406,260 A 4/1995 Cummings et al.
5,410,535 A 4/1995 Yang et al.
5,414,708 A 5/1995 Webber et al.
5,420,572 A 5/1995 Dolin, Jr. et al.
5,420,578 A 5/1995 O'Brien et al.
5,420,886 A 5/1995 Ohmori
5,421,030 A 5/1995 Baran
5,422,519 A 6/1995 Russell
5,422,929 A 6/1995 Hurst et al.
5,424,710 A 6/1995 Baumann
5,425,089 A 6/1995 Chan et al.
5,428,608 A 6/1995 Freeman et al.
5,428,682 A 6/1995 Apfel
5,438,678 A 8/1995 Smith
5,440,335 A 8/1995 Beveridge
5,446,905 A 8/1995 Koshiishi
5,450,393 A 9/1995 Watanabe et al.
5,451,923 A 9/1995 Seberger et al.
5,454,008 A 9/1995 Baumann et al.
5,457,629 A 10/1995 Miller et al.
5,461,671 A 10/1995 Sakuragi et al.
5,467,384 A 11/1995 Skinner, Sr. et al.
5,469,150 A 11/1995 Sitte
5,471,190 A 11/1995 Zimmermann
5,473,517 A 12/1995 Blackman
5,475,687 A 12/1995 Markkula, Jr. et al.
5,477,091 A 12/1995 Fiorina et al.
5,479,421 A 12/1995 Takebe
5,479,447 A 12/1995 Chow et al.
5,483,230 A 1/1996 Mueller
5,483,574 A 1/1996 Yuyama
5,483,656 A 1/1996 Oprescu et al.
5,487,066 A 1/1996 McNamara et al.
5,491,402 A 2/1996 Small
5,491,463 A 2/1996 Sargeant et al.
5,499,241 A 3/1996 Thompson et al.
5,500,794 A 3/1996 Fujita et al.
5,504,454 A 4/1996 Daggett et al.
5,513,251 A 4/1996 Rochkind et al.
5,517,172 A 5/1996 Chiu
5,519,731 A 5/1996 Cioffi
5,525,962 A 6/1996 Tice
5,528,089 A 6/1996 Guiset et al.
5,528,507 A 6/1996 McNamara et al.
5,530,748 A 6/1996 Ohmori
5,534,912 A 7/1996 Kostreski
5,535,336 A 7/1996 Smith et al.
5,539,805 A 7/1996 Bushue et al.
5,539,821 A 7/1996 Blonder
5,544,164 A 8/1996 Baran
5,544,243 A 8/1996 Papadopoulos
5,546,385 A 8/1996 Caspi et al.
5,548,614 A 8/1996 Stoll et al.
5,550,900 A 8/1996 Ensor et al.
5,553,138 A 9/1996 Heald et al.
5,557,612 A 9/1996 Bingham
5,562,493 A 10/1996 Ferrill et al.
5,563,515 A 10/1996 Kako
5,563,782 A 10/1996 Chen et al.
5,568,547 A 10/1996 Nishimura
5,569,209 A 10/1996 Roitman
5,570,085 A 10/1996 Bertsch
5,572,182 A 11/1996 De Pinho Filho et al.
5,574,256 A 11/1996 Cottone
5,574,748 A 11/1996 Vander Mey et al.
5,579,221 A 11/1996 Mun
5,579,486 A * 11/1996 Oprescu et al. 710/107
5,581,801 A 12/1996 Spriester et al.
5,583,934 A 12/1996 Zhou
5,590,124 A 12/1996 Robins
5,594,726 A 1/1997 Thompson et al.
5,594,732 A 1/1997 Bell et al.
5,594,789 A 1/1997 Seazholtz et al.
5,599,190 A 2/1997 Willette
5,608,447 A 3/1997 Farry et al.
5,608,725 A 3/1997 Grube et al.
5,608,792 A 3/1997 Laidler
5,610,552 A 3/1997 Schlesinger et al.
5,610,922 A 3/1997 Balatoni
5,613,130 A 3/1997 Teng et al.
5,613,190 A 3/1997 Hylton
5,613,191 A 3/1997 Hylton et al.
5,619,505 A 4/1997 Grube et al.
5,623,537 A 4/1997 Ensor et al.
5,625,651 A 4/1997 Cioffi
5,625,677 A 4/1997 Feiertag et al.
5,625,863 A 4/1997 Abraham
5,627,501 A 5/1997 Biran et al.
5,635,896 A 6/1997 Tinsley et al.
5,638,512 A 6/1997 Osman et al.
5,644,286 A 7/1997 Brosh et al.
5,651,696 A 7/1997 Jennison
5,652,893 A 7/1997 Ben-Meir et al.
5,659,608 A 8/1997 Stiefel
5,668,814 A 9/1997 Balatoni

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,668,857 A 9/1997 McHale
5,671,220 A 9/1997 Tonomura
5,673,290 A 9/1997 Cioffi
5,675,813 A 10/1997 Holmdahl
5,680,397 A 10/1997 Christensen et al.
5,682,423 A 10/1997 Walker
5,684,826 A 11/1997 Ratner
5,689,230 A 11/1997 Merwin et al.
5,696,790 A 12/1997 Graham et al.
5,699,413 A 12/1997 Sridhar
5,706,007 A 1/1998 Fragnito et al.
5,706,157 A 1/1998 Galecki et al.
5,706,278 A * 1/1998 Robillard et al. 370/222
5,708,701 A 1/1998 Houvig et al.
5,708,705 A 1/1998 Yamashita et al.
5,712,614 A 1/1998 Patel et al.
5,712,977 A 1/1998 Glad et al.
5,727,025 A 3/1998 Maryanka
5,736,965 A 4/1998 Mosebrook et al.
5,742,527 A 4/1998 Rybicki et al.
5,748,634 A 5/1998 Sokol et al.
5,751,701 A 5/1998 Langberg et al.
5,754,539 A 5/1998 Metz et al.
5,756,280 A 5/1998 Soora et al.
5,768,279 A 6/1998 Barn et al.
5,771,236 A 6/1998 Sansom et al.
5,774,789 A 6/1998 Van der Kaay et al.
5,777,769 A 7/1998 Coutinho
5,778,303 A 7/1998 Shinozaki et al.
5,781,617 A 7/1998 McHale et al.
5,781,844 A 7/1998 Spriester et al.
5,790,548 A 8/1998 Sistanizadeh et al.
5,793,413 A 8/1998 Hylton et al.
5,796,739 A 8/1998 Kim et al.
5,796,965 A 8/1998 Choi et al.
5,799,069 A 8/1998 Weston et al.
5,799,196 A 8/1998 Flannery
5,801,635 A 9/1998 Price
5,802,173 A 9/1998 Hamilton-Piercy et al.
5,805,053 A 9/1998 Patel et al.
5,805,591 A 9/1998 Naboulsi et al.
5,805,597 A 9/1998 Edem
5,805,806 A 9/1998 McArthur
5,809,033 A 9/1998 Turner et al.
5,815,681 A 9/1998 Kikinis
5,818,710 A 10/1998 Levan Suu
5,818,725 A 10/1998 McNamara et al.
5,818,821 A 10/1998 Schurig
5,822,374 A 10/1998 Levin
5,822,677 A 10/1998 Peyrovian
5,822,678 A 10/1998 Evanyk
5,828,293 A 10/1998 Rickard
5,828,558 A 10/1998 Korcharz et al.
5,828,821 A 10/1998 Hoshina et al.
5,832,057 A 11/1998 Furman
5,833,350 A 11/1998 Moreland
5,835,005 A 11/1998 Furukawa et al.
5,838,989 A 11/1998 Hutchison et al.
5,841,841 A 11/1998 Dodds et al.
5,842,032 A 11/1998 Bertsch
5,844,596 A 12/1998 Goodman
5,844,888 A 12/1998 Markkula, Jr. et al.
5,845,190 A 12/1998 Bushue et al.
5,845,201 A 12/1998 Funke et al.
5,848,054 A 12/1998 Mosebrook et al.
5,848,376 A 12/1998 Steiner et al.
5,859,584 A 1/1999 Counsell
5,859,596 A 1/1999 McRae
5,878,047 A 3/1999 Ganek et al.
5,878,133 A 3/1999 Zhou et al.
5,884,086 A 3/1999 Amoni et al.
5,886,732 A 3/1999 Humpleman
5,889,856 A 3/1999 O'Toole et al.
5,892,792 A 4/1999 Walley
5,892,795 A 4/1999 Paret
5,895,985 A 4/1999 Fischer
5,896,443 A 4/1999 Dichter
5,896,556 A 4/1999 Moreland et al.
5,898,761 A 4/1999 McHale et al.
5,903,213 A 5/1999 Hodge et al.
5,905,781 A 5/1999 McHale et al.
5,905,786 A 5/1999 Hoopes
5,909,559 A 6/1999 So
5,910,970 A 6/1999 Lu
5,912,895 A 6/1999 Terry et al.
5,917,624 A 6/1999 Wagner
5,917,814 A 6/1999 Balatoni
5,929,896 A 7/1999 Goodman et al.
5,930,340 A 7/1999 Bell
5,936,963 A 8/1999 Saussy
5,938,757 A 8/1999 Bertsch
5,939,801 A 8/1999 Bouffard et al.
5,940,400 A 8/1999 Eastmond et al.
5,940,738 A 8/1999 Rao
5,944,831 A 8/1999 Pate et al.
5,949,473 A 9/1999 Goodman
5,956,323 A 9/1999 Bowie
5,960,066 A 9/1999 Hartmann et al.
5,960,208 A 9/1999 Obata et al.
5,963,539 A 10/1999 Webber, Jr. et al.
5,963,595 A 10/1999 Graham et al.
5,963,844 A 10/1999 Dail
5,968,118 A 10/1999 Sutton, Jr.
5,973,942 A 10/1999 Nelson et al.
5,974,553 A 10/1999 Gandar
5,978,373 A 11/1999 Hoff et al.
5,982,052 A 11/1999 Sosnowski
5,987,061 A 11/1999 Chen
5,990,577 A 11/1999 Kamioka et al.
5,991,311 A 11/1999 Long et al.
5,991,831 A 11/1999 Lee et al.
5,991,885 A 11/1999 Chang et al.
5,994,998 A 11/1999 Fisher et al.
5,999,518 A 12/1999 Nattkemper et al.
5,999,612 A 12/1999 Dunn et al.
6,002,682 A 12/1999 Bellenger et al.
6,009,465 A 12/1999 Decker et al.
6,009,479 A 12/1999 Jeffries
6,010,228 A 1/2000 Blackman et al.
6,011,781 A 1/2000 Bell
6,011,794 A 1/2000 Mordowitz et al.
6,011,910 A 1/2000 Chau et al.
6,014,386 A 1/2000 Abraham
6,014,431 A 1/2000 McHale et al.
6,016,519 A 1/2000 Chida et al.
6,021,158 A 2/2000 Schurr et al.
6,025,945 A 2/2000 Nyu et al.
6,026,078 A 2/2000 Smith
6,026,160 A 2/2000 Staber et al.
6,028,867 A 2/2000 Rawson et al.
6,033,101 A 3/2000 Reddick et al.
6,038,300 A 3/2000 Hartmann et al.
6,038,425 A 3/2000 Jeffrey
6,038,457 A 3/2000 Barkat
6,049,471 A 4/2000 Korcharz et al.
6,049,531 A 4/2000 Roy
6,049,881 A 4/2000 Massman et al.
6,055,268 A 4/2000 Timm et al.
6,055,633 A 4/2000 Schrier et al.
6,061,261 A 5/2000 Chen et al.
6,064,422 A 5/2000 Goolcharan et al.
6,064,673 A 5/2000 Anderson et al.
6,069,588 A 5/2000 O'Neill, Jr.
6,069,879 A 5/2000 Chatter
6,069,890 A 5/2000 White et al.
6,069,899 A 5/2000 Foley
6,072,779 A 6/2000 Tzannes et al.
6,072,810 A 6/2000 Van Der Putten et al.
6,075,784 A 6/2000 Frankel et al.
6,081,519 A 6/2000 Petler
6,081,533 A 6/2000 Laubach et al.
6,087,835 A 7/2000 Haneda
6,087,860 A 7/2000 Liu et al.
6,095,867 A 8/2000 Brandt et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,097,761 A 8/2000 Buhring et al.
6,101,499 A 8/2000 Ford et al.
6,107,912 A 8/2000 Bullock et al.
6,108,330 A 8/2000 Bhatia et al.
6,108,331 A 8/2000 Thompson
6,109,959 A 8/2000 Burlinson et al.
6,111,595 A 8/2000 Hertrich
6,111,764 A 8/2000 Atou et al.
6,111,936 A 8/2000 Bremer
6,112,232 A 8/2000 Shahar et al.
6,114,632 A 9/2000 Planas, Sr. et al.
6,114,970 A 9/2000 Kirson et al.
6,115,468 A * 9/2000 De Nicolo 379/413
6,115,755 A 9/2000 Krishan
6,115,822 A 9/2000 Kim et al.
6,123,577 A 9/2000 Contois et al.
6,125,448 A 9/2000 Schwan et al.
6,126,463 A 10/2000 Okazaki et al.
6,128,743 A 10/2000 Rothenbaum
6,130,879 A 10/2000 Liu
6,130,896 A 10/2000 Lueker et al.
6,137,865 A 10/2000 Ripy et al.
6,137,866 A 10/2000 Staber et al.
6,141,330 A 10/2000 Akers
6,141,339 A 10/2000 Kaplan et al.
6,141,763 A 10/2000 Smith et al.
6,144,292 A 11/2000 Brown
6,148,006 A 11/2000 Dyke et al.
6,151,480 A 11/2000 Fischer et al.
6,157,645 A 12/2000 Shobatake
6,157,716 A 12/2000 Ortel
6,166,496 A 12/2000 Lys et al.
6,167,043 A 12/2000 Frantz
6,167,120 A 12/2000 Kikinis
6,175,556 B1 1/2001 Allen, Jr. et al.
6,175,860 B1 1/2001 Gaucher
6,178,161 B1 1/2001 Terry
6,178,455 B1 1/2001 Schutte et al.
6,178,514 B1 1/2001 Wood
6,181,775 B1 1/2001 Bella
6,181,783 B1 1/2001 Goodman
6,185,284 B1 2/2001 Goodman
6,186,826 B1 2/2001 Weikle
6,188,314 B1 2/2001 Wallace et al.
6,188,557 B1 2/2001 Chaudhry
6,192,399 B1 2/2001 Goodman
6,195,339 B1 2/2001 Erite et al.
6,195,706 B1 2/2001 Scott
6,205,202 B1 3/2001 Yoshida et al.
6,205,495 B1 3/2001 Gilbert et al.
6,207,895 B1 3/2001 Engel
6,208,637 B1 3/2001 Eames
6,208,859 B1 3/2001 Halvorson
6,212,204 B1 4/2001 Depue
6,212,274 B1 4/2001 Ninh
6,215,789 B1 4/2001 Keenan et al.
6,215,855 B1 4/2001 Schneider
6,216,160 B1 4/2001 Dichter
6,218,930 B1 4/2001 Katzenberg et al.
6,219,409 B1 4/2001 Smith et al.
6,222,124 B1 4/2001 Pritchard et al.
6,222,853 B1 4/2001 Marttinen et al.
6,227,499 B1 5/2001 Jennison et al.
6,229,818 B1 5/2001 Bell
6,236,653 B1 5/2001 Dalton et al.
6,236,664 B1 5/2001 Erreygers
6,236,718 B1 5/2001 Goodman
6,239,672 B1 5/2001 Lutz, Jr. et al.
6,240,091 B1 5/2001 Ginzboorg et al.
6,240,166 B1 5/2001 Collin et al.
6,243,394 B1 6/2001 Deng
6,243,413 B1 6/2001 Beukema
6,243,446 B1 6/2001 Goodman
6,243,571 B1 6/2001 Bullock et al.
6,243,818 B1 6/2001 Schwan et al.
6,246,695 B1 6/2001 Seazholtz et al.
6,246,716 B1 6/2001 Schneider
6,246,748 B1 6/2001 Yano
6,252,754 B1 6/2001 Chaudhry
6,252,755 B1 6/2001 Willer
6,252,957 B1 6/2001 Jauregui et al.
6,256,518 B1 7/2001 Buhrmann
6,259,676 B1 7/2001 Kellock et al.
6,266,348 B1 7/2001 Gross et al.
6,272,219 B1 8/2001 De Bruycker et al.
6,278,769 B1 8/2001 Bella
6,282,075 B1 8/2001 Chaudhry
6,282,189 B1 8/2001 Eames
6,283,789 B1 9/2001 Tsai
6,286,049 B1 9/2001 Rajakarunanayake et al.
6,288,334 B1 9/2001 Hennum
6,292,517 B1 9/2001 Jeffress et al.
6,295,356 B1 9/2001 De Nicolo
6,297,450 B1 10/2001 Yu
6,298,037 B1 10/2001 Sharifi
6,301,337 B1 10/2001 Scholtz et al.
6,301,527 B1 10/2001 Butland et al.
6,308,215 B1 10/2001 Kolbet et al.
6,308,240 B1 10/2001 De Nicolo
6,310,286 B1 10/2001 Troxel et al.
6,310,781 B1 10/2001 Karam
6,310,909 B1 10/2001 Jones
6,314,102 B1 11/2001 Czerwiec et al.
6,317,839 B1 11/2001 Wells
6,317,884 B1 11/2001 Eames
6,320,494 B1 11/2001 Bartels et al.
6,320,866 B2 11/2001 Wolf et al.
6,320,900 B1 11/2001 Liu
6,329,937 B1 12/2001 Harman
6,343,331 B1 1/2002 Stirling
6,346,964 B1 2/2002 Rogers et al.
6,348,874 B1 2/2002 Cole et al.
6,349,133 B1 2/2002 Matthews et al.
6,353,629 B1 3/2002 Pal
6,357,011 B2 3/2002 Gilbert
6,359,906 B1 3/2002 Dyke et al.
6,362,610 B1 3/2002 Yang
6,362,987 B1 3/2002 Yurek et al.
6,363,066 B1 3/2002 Frimodig
6,364,535 B1 4/2002 Coffey
6,366,143 B1 4/2002 Liu et al.
6,377,874 B1 4/2002 Ykema
6,380,852 B1 4/2002 Hartman
6,383,076 B1 5/2002 Tiedeken
6,385,024 B1 5/2002 Olson
6,385,203 B2 5/2002 McHale et al.
6,388,990 B1 5/2002 Wetzel
6,389,110 B1 5/2002 Fischer et al.
6,389,139 B1 5/2002 Curtis et al.
6,393,050 B1 5/2002 Liu
6,393,607 B1 5/2002 Hughes et al.
6,396,391 B1 5/2002 Binder
6,396,837 B1 5/2002 Wang et al.
6,404,861 B1 6/2002 Cohen et al.
6,408,351 B1 6/2002 Hamdi et al.
6,411,656 B1 6/2002 Bors
6,414,952 B2 7/2002 Foley
6,418,558 B1 7/2002 Roberts et al.
6,420,964 B1 7/2002 Nishikawa et al.
6,430,199 B1 8/2002 Kerpez
6,433,672 B1 8/2002 Shirmard
6,438,109 B1 8/2002 Karaoguz et al.
6,441,723 B1 8/2002 Mansfield, Jr. et al.
6,442,195 B1 8/2002 Liu et al.
6,445,087 B1 9/2002 Wang et al.
6,448,899 B1 9/2002 Thompson
6,449,318 B1 9/2002 Rumbaugh
6,449,348 B1 9/2002 Lamb et al.
6,452,923 B1 9/2002 Gerszberg et al.
6,456,714 B2 9/2002 Shima et al.
6,459,175 B1 10/2002 Potega
6,459,275 B1 10/2002 Ewalt et al.
6,463,051 B1 10/2002 Ford
6,470,053 B1 10/2002 Liu

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,470,401 B1 10/2002 Peterson
6,473,608 B1 10/2002 Lehr et al.
6,474,829 B2 11/2002 Clodfelter
6,475,022 B2 11/2002 Tomino et al.
6,477,457 B1 11/2002 Fendt et al.
6,477,595 B1 11/2002 Cohen et al.
6,480,122 B1 11/2002 Oddy et al.
6,481,013 B1 11/2002 Dinwiddie et al.
6,483,902 B1 11/2002 Stewart et al.
6,483,903 B1 11/2002 Itay
6,490,273 B1 12/2002 DeNap et al.
6,492,897 B1 12/2002 Mowery, Jr.
6,493,875 B1 12/2002 Eames et al.
6,496,103 B1 12/2002 Weiss et al.
6,501,389 B1 12/2002 Aguirre
6,507,322 B2 1/2003 Fang et al.
6,510,204 B2 1/2003 De Clercq et al.
6,518,724 B2 2/2003 Janik
6,519,291 B1 2/2003 Dagdeviren
6,522,352 B1 2/2003 Strandwitz et al.
6,522,515 B1 2/2003 Whitney
6,522,662 B1 2/2003 Liu
6,526,516 B1 2/2003 Ishikawa et al.
6,529,443 B2 3/2003 Downey, Jr. et al.
6,535,110 B1 3/2003 Arora et al.
6,535,580 B1 3/2003 Strauss et al.
6,535,587 B1 3/2003 Kobayashi
6,535,983 B1 3/2003 McCormack et al.
6,539,011 B1 3/2003 Keenan et al.
6,539,484 B1 3/2003 Cruz
6,541,878 B1 4/2003 Diab
6,542,465 B1 4/2003 Wang
6,542,585 B2 4/2003 Goodman
6,543,940 B2 4/2003 Chu
6,546,024 B1 4/2003 Sharper et al.
6,546,098 B1 4/2003 Henderson
6,546,494 B1 4/2003 Jackson et al.
6,553,076 B1 4/2003 Huang
6,556,097 B2 4/2003 Coffey
6,556,564 B2 4/2003 Rogers
6,556,581 B1 4/2003 He et al.
6,560,333 B1 5/2003 Consiglio et al.
6,563,418 B1 5/2003 Moon
6,563,816 B1 5/2003 Nodoushani et al.
6,567,522 B1 5/2003 Blackburn
6,567,981 B1 5/2003 Jeffrey
6,570,890 B1 5/2003 Keenan et al.
6,571,181 B1 5/2003 Rakshani et al.
6,571,305 B1 5/2003 Engler
6,572,384 B1 6/2003 Marchevsky
6,574,237 B1 6/2003 Bullman et al.
6,574,242 B1 6/2003 Keenan et al.
6,574,313 B1 6/2003 Chea, Jr. et al.
6,574,741 B1 6/2003 Fujimori et al.
6,577,230 B1 6/2003 Wendt et al.
6,577,631 B1 6/2003 Keenan et al.
6,577,882 B1 6/2003 Roos
6,580,254 B2 6/2003 Schofield
6,580,710 B1 6/2003 Bowen et al.
6,580,727 B1 6/2003 Yim et al.
6,584,122 B1 6/2003 Matthews et al.
6,584,148 B1 6/2003 Zitting et al.
6,584,197 B1 6/2003 Boudreaux, Jr. et al.
6,584,519 B1 6/2003 Russell
6,587,454 B1 7/2003 Lamb
6,587,479 B1 7/2003 Bianchi
6,587,560 B1 7/2003 Scott et al.
6,597,732 B1 7/2003 Dowling
6,601,097 B1 7/2003 Cheston et al.
6,603,220 B2 8/2003 Vergnaud
6,608,264 B1 8/2003 Fouladpour
6,611,537 B1 8/2003 Edens et al.
6,616,005 B1 9/2003 Pereira et al.
6,636,505 B1 10/2003 Wang et al.
6,639,913 B1 10/2003 Frankel et al.
6,640,308 B1 10/2003 Keyghobad et al.
6,643,566 B1 11/2003 Lehr et al.
6,648,308 B2 11/2003 Gunnar Rothoff
6,650,622 B1 11/2003 Austerman, III et al.
6,650,662 B1 11/2003 Arnaud et al.
6,653,932 B1 11/2003 Walley et al.
6,654,353 B1 11/2003 Tokura et al.
6,658,098 B2 12/2003 Lamb et al.
6,658,108 B1 12/2003 Bissell et al.
6,658,109 B1 12/2003 Steinke et al.
6,659,947 B1 12/2003 Carter et al.
6,661,892 B1 12/2003 Fischer
6,665,404 B2 12/2003 Cohen
6,671,360 B2 12/2003 Sumiya et al.
6,674,843 B1 1/2004 Ham
6,674,845 B2 1/2004 Ayoub et al.
6,678,321 B1 1/2004 Graham et al.
6,680,940 B1 1/2004 Lewin et al.
6,681,013 B1 1/2004 Miyamoto
6,690,792 B1 2/2004 Robinson et al.
6,700,970 B1 3/2004 Aronson et al.
6,701,443 B1 3/2004 Bell
6,704,824 B1 3/2004 Goodman
6,710,553 B2 3/2004 Logan
6,710,704 B2 3/2004 Fisher et al.
6,711,260 B1 3/2004 Russell et al.
6,714,534 B1 3/2004 Gerszberg et al.
6,715,087 B1 3/2004 Vergnaud et al.
6,718,552 B1 4/2004 Goode
6,721,790 B1 4/2004 Chen
6,724,750 B1 4/2004 Sun
6,725,059 B1 4/2004 Bell
6,731,627 B1 5/2004 Gupta et al.
6,732,315 B2 5/2004 Yagil et al.
6,735,217 B1 5/2004 Webber, Jr. et al.
6,738,470 B1 5/2004 Aronovitz
6,738,641 B1 5/2004 Elsasser
6,744,883 B1 6/2004 Bingel et al.
6,747,859 B2 6/2004 Walbeck et al.
6,747,995 B1 6/2004 Brown et al.
6,747,996 B2 6/2004 Holloway et al.
6,748,078 B1 6/2004 Posthuma
6,751,682 B1 6/2004 Stirling
6,754,235 B2 6/2004 Van Der Putten et al.
6,755,575 B2 6/2004 Kronlund et al.
6,757,382 B1 6/2004 Wilkes, Jr. et al.
6,760,384 B1 7/2004 Garreau et al.
6,762,675 B1 7/2004 Cafiero et al.
6,763,097 B1 7/2004 Vitenberg
6,763,109 B1 7/2004 Hoskins
6,764,343 B2 7/2004 Ferentz
6,765,149 B1 7/2004 Ku
6,771,774 B1 8/2004 Phan et al.
6,775,299 B1 8/2004 Olson et al.
6,778,549 B1 8/2004 Keller
6,778,646 B1 8/2004 Sun
6,792,323 B2 9/2004 Krzyzanowski et al.
6,795,539 B2 9/2004 Culli et al.
6,800,957 B2 10/2004 Nerone et al.
6,804,351 B1 10/2004 Karam
6,804,828 B1 10/2004 Shibata
6,813,343 B1 11/2004 Vitenberg
6,815,844 B2 11/2004 Kovarik
6,816,512 B2 11/2004 Lazarus et al.
6,819,760 B1 11/2004 Nayler
6,825,672 B1 11/2004 Lo et al.
6,826,174 B1 11/2004 Erekson et al.
6,831,921 B2 12/2004 Higgins
6,831,976 B1 12/2004 Comerford et al.
6,838,997 B1 1/2005 Davidson
6,839,345 B2 1/2005 Lu et al.
6,841,979 B2 1/2005 Berson et al.
6,842,426 B2 1/2005 Bogardus et al.
6,847,718 B1 1/2005 Hiraoka
6,853,724 B2 2/2005 Wang
6,854,895 B2 2/2005 Coffey et al.
6,856,799 B1 2/2005 Ritter
6,862,353 B2 3/2005 Rabenko et al.
6,864,798 B2 3/2005 Janik

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,868,072 B1 3/2005 Lin et al.
6,868,117 B1 3/2005 Mardinian
6,868,265 B2 3/2005 Zodnik
6,870,282 B1 3/2005 Bischoff et al.
6,880,020 B1 4/2005 Rubinstein et al.
6,886,181 B1 4/2005 Dodds et al.
6,889,095 B1 5/2005 Eidson et al.
6,891,881 B2 5/2005 Trachewsky et al.
6,895,089 B2 5/2005 Wang
6,898,413 B2 5/2005 Yip et al.
6,901,439 B1 5/2005 Bonasia et al.
6,904,149 B2 6/2005 Keenum et al.
6,906,618 B2 6/2005 Hair, III et al.
6,907,458 B2 6/2005 Tomassetti et al.
6,912,145 B2 6/2005 Hung et al.
6,912,282 B2 6/2005 Karam
6,917,681 B2 7/2005 Robinson et al.
6,932,624 B1 8/2005 Hoopes et al.
6,933,686 B1 8/2005 Bishel
6,934,300 B2 8/2005 Tomassetti et al.
6,940,918 B1 9/2005 Nayler et al.
6,940,956 B1 9/2005 Leach
6,943,296 B2 9/2005 Perrella et al.
6,943,683 B2 9/2005 Perret
6,946,988 B2 9/2005 Edwards et al.
6,947,287 B1 9/2005 Zansky et al.
6,952,785 B1 10/2005 Diab et al.
6,954,863 B2 10/2005 Mouton
6,955,560 B1 10/2005 Biggs
6,956,462 B2 10/2005 Jetzt
6,956,463 B2 10/2005 Crenella et al.
6,956,826 B1 10/2005 Binder
6,961,303 B1 11/2005 Binder
6,963,936 B2 11/2005 Billington et al.
6,967,952 B1 11/2005 Akers et al.
6,973,394 B2 12/2005 Jaeger et al.
6,975,209 B2 12/2005 Gromov
6,975,713 B1 12/2005 Smith et al.
6,977,507 B1 12/2005 Pannell et al.
6,980,638 B1 12/2005 Smith et al.
6,981,892 B1 1/2006 Kostelnik
6,985,713 B2 1/2006 Lehr et al.
6,986,071 B2 1/2006 Darshan et al.
6,993,289 B2 1/2006 Janik
6,995,658 B2 2/2006 Tustison et al.
6,996,134 B1 2/2006 Renucci et al.
6,996,458 B2 2/2006 Pincu et al.
6,996,729 B2 2/2006 Volkening et al.
6,998,964 B2 2/2006 Lomax, Jr. et al.
6,999,433 B2 2/2006 Baum
7,003,102 B2 2/2006 Kiko
7,006,445 B1 2/2006 Cole et al.
7,010,050 B2 3/2006 Maryanka
7,012,922 B1 3/2006 Unitt et al.
7,016,377 B1 3/2006 Chun et al.
7,023,809 B1 4/2006 Rubinstein et al.
7,026,730 B1 4/2006 Marshall et al.
7,027,483 B2 4/2006 Santhoff et al.
7,030,733 B2 4/2006 Abbarin
7,031,394 B2 4/2006 Vitenberg
7,034,225 B2 4/2006 Thompson et al.
7,035,270 B2 4/2006 Moore, Jr. et al.
7,035,280 B2 4/2006 Binder
7,046,983 B2 5/2006 Elkayam et al.
7,049,514 B2 5/2006 Brandt et al.
7,050,546 B1 5/2006 Richardson et al.
7,053,501 B1 5/2006 Barrass
7,054,442 B2 5/2006 Weikle
7,058,174 B2 6/2006 Posthuma
7,061,142 B1 6/2006 Marshall
7,068,649 B2 6/2006 Fisher et al.
7,068,682 B2 6/2006 Campbell et al.
7,068,781 B2 6/2006 Le Creff et al.
7,072,995 B1 7/2006 Burroughs
7,079,647 B2 7/2006 Tomobe
7,081,827 B2 7/2006 Addy
7,085,238 B2 8/2006 McBeath
7,088,238 B2 8/2006 Karaoguz et al.
7,089,126 B2 8/2006 Muir
7,095,848 B1 8/2006 Fischer et al.
7,099,707 B2 8/2006 Amin et al.
7,113,574 B1 9/2006 Haas et al.
7,116,685 B2 10/2006 Brown et al.
7,117,272 B2 10/2006 Rimboim et al.
7,133,423 B1 11/2006 Chow et al.
7,143,299 B1 11/2006 Rubinstein et al.
7,145,439 B2 12/2006 Darshan et al.
7,145,996 B2 12/2006 Creamer et al.
7,149,182 B1 12/2006 Renucci et al.
7,152,168 B2 12/2006 Boynton et al.
7,154,381 B2 12/2006 Lang et al.
7,155,214 B2 12/2006 Struthers et al.
7,155,622 B2 12/2006 Mancey et al.
7,162,234 B1 1/2007 Smith
7,162,377 B2 1/2007 Amrod et al.
7,162,650 B2 1/2007 Ke et al.
7,167,923 B2 1/2007 Lo
7,170,194 B2 1/2007 Korcharz et al.
7,170,405 B2 1/2007 Daum et al.
7,181,023 B1 2/2007 Andrews et al.
7,187,695 B2 3/2007 Binder
7,190,716 B2 3/2007 Norrell et al.
7,193,149 B2 3/2007 Polanek et al.
7,194,639 B2 3/2007 Atkinson et al.
7,200,152 B2 * 4/2007 Binder 370/463
7,203,849 B2 4/2007 Dove
7,203,851 B1 4/2007 Lo et al.
7,207,846 B2 4/2007 Caveney et al.
7,209,945 B2 4/2007 Hicks, III et al.
7,215,763 B1 5/2007 Keller et al.
7,221,261 B1 5/2007 Klingensmith et al.
7,225,345 B2 5/2007 Korcharz et al.
7,231,535 B2 6/2007 Le Creff et al.
7,239,627 B2 7/2007 Nattkemper et al.
7,239,628 B1 7/2007 Pendleton et al.
7,240,224 B1 7/2007 Biederman
7,254,734 B2 8/2007 Lehr et al.
7,256,684 B1 8/2007 Cafiero et al.
7,256,704 B2 8/2007 Yoon et al.
7,257,106 B2 8/2007 Chen et al.
7,257,108 B2 8/2007 Cheston et al.
7,263,362 B1 8/2007 Young et al.
7,272,669 B2 9/2007 Mattur et al.
7,274,669 B2 9/2007 Czerwiec et al.
7,280,032 B2 10/2007 Aekins et al.
7,281,141 B2 10/2007 Elkayam et al.
7,283,554 B2 10/2007 Ophir et al.
7,292,859 B2 11/2007 Park
7,293,103 B1 11/2007 Lin et al.
7,299,287 B1 11/2007 Rubinstein et al.
7,299,368 B2 11/2007 Peker et al.
7,301,940 B1 11/2007 Bernstein
7,305,006 B1 12/2007 Bella
7,308,086 B2 12/2007 Yoshitani
7,310,355 B1 12/2007 Krein et al.
7,316,586 B2 1/2008 Anderson et al.
7,324,824 B2 1/2008 Smith
7,327,765 B1 2/2008 Ojard
7,330,695 B2 2/2008 Karschnia et al.
7,331,819 B2 2/2008 Nelson
7,340,051 B2 3/2008 Phillips et al.
7,343,506 B1 3/2008 Fenwick
7,346,071 B2 3/2008 Bareis
7,353,407 B2 4/2008 Diab et al.
7,356,588 B2 4/2008 Stineman, Jr. et al.
7,363,525 B2 4/2008 Biederman et al.
7,368,798 B2 5/2008 Camagna et al.
7,373,528 B2 5/2008 Schindler
7,376,734 B2 5/2008 Caveney
7,380,044 B1 5/2008 Liburdi
7,382,786 B2 6/2008 Chen et al.
7,404,091 B1 7/2008 Gere
7,404,094 B2 7/2008 Lee et al.
7,406,614 B2 7/2008 Peleg et al.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,408,949	B2	8/2008	Baum
7,483,524	B2	1/2009	Binder
7,633,966	B2	12/2009	Binder
7,636,373	B2	12/2009	Binder
7,653,033	B2	1/2010	Beach et al.
7,769,030	B2	8/2010	Binder
7,830,858	B2	11/2010	Binder
7,852,874	B2	12/2010	Binder
2001/0011314	A1	8/2001	Gallagher et al.
2001/0030470	A1	10/2001	Waugh et al.
2001/0039660	A1	11/2001	Vasilevsky et al.
2001/0047418	A1	11/2001	White
2002/0015489	A1	2/2002	Ben-David
2002/0021465	A1	2/2002	Moore, Jr. et al.
2002/0031114	A1	3/2002	Terry et al.
2002/0035624	A1	3/2002	Kim
2002/0038153	A1	3/2002	Amodeo et al.
2002/0039388	A1	4/2002	Smart et al.
2002/0057581	A1	5/2002	Nadav
2002/0059634	A1	5/2002	Terry et al.
2002/0063584	A1	5/2002	Molenda et al.
2002/0064039	A1	5/2002	Clodfelter
2002/0069417	A1	6/2002	Kliger et al.
2002/0076038	A1	6/2002	Barrese et al.
2002/0097821	A1	7/2002	Hebron et al.
2002/0104009	A1	8/2002	Zodnik
2002/0110236	A1	8/2002	Karnad
2002/0114325	A1	8/2002	Dale et al.
2002/0116720	A1	8/2002	Terry et al.
2002/0118676	A1	8/2002	Tonnby et al.
2002/0150100	A1	10/2002	White et al.
2002/0150155	A1	10/2002	Florentin et al.
2002/0154629	A1	10/2002	Lohman et al.
2002/0159402	A1	10/2002	Binder
2002/0166124	A1	11/2002	Gurantz et al.
2002/0166125	A1	11/2002	Fulmer
2002/0174423	A1	11/2002	Fifield et al.
2002/0180592	A1	12/2002	Gromov
2002/0194383	A1	12/2002	Cohen et al.
2002/0194605	A1	12/2002	Cohen et al.
2003/0039257	A1	2/2003	Manis et al.
2003/0048895	A1	3/2003	Kiko et al.
2003/0061522	A1	3/2003	Ke et al.
2003/0062990	A1	4/2003	Schaeffer, Jr. et al.
2003/0066082	A1	4/2003	Kliger et al.
2003/0099228	A1	5/2003	Alcock
2003/0107269	A1	6/2003	Jetzt
2003/0112965	A1	6/2003	McNamara et al.
2003/0133476	A1	7/2003	Stone et al.
2003/0146765	A1	8/2003	Darshan et al.
2003/0151695	A1	8/2003	Sahlin et al.
2003/0154273	A1	8/2003	Caveney
2003/0154276	A1	8/2003	Caveney
2003/0198246	A1	10/2003	Lifshitz et al.
2003/0198341	A1	10/2003	Smith et al.
2003/0206623	A1	11/2003	Deichstetter et al.
2003/0207696	A1	11/2003	Willenegger et al.
2004/0013098	A1	1/2004	Tseng et al.
2004/0033817	A1	2/2004	Gorsuch et al.
2004/0073597	A1	4/2004	Caveney et al.
2004/0087214	A1	5/2004	Cho
2004/0107445	A1	6/2004	Amit
2004/0121648	A1	6/2004	Voros
2004/0136384	A1	7/2004	Cho
2004/0146061	A1	7/2004	Bisceglia et al.
2004/0147232	A1	7/2004	Zodnik
2004/0164619	A1	8/2004	Parker et al.
2004/0172658	A1	9/2004	Rakib et al.
2004/0198236	A1	10/2004	Paine et al.
2004/0204017	A1	10/2004	Eckel et al.
2004/0208167	A1	10/2004	Kishida
2004/0230846	A1	11/2004	Mancey et al.
2004/0232768	A1	11/2004	Hung et al.
2004/0236967	A1	11/2004	Korcharz et al.
2004/0250273	A1	12/2004	Swix et al.
2004/0268160	A1	12/2004	Atkinson et al.
2005/0047379	A1	3/2005	Boyden et al.
2005/0053087	A1	3/2005	Pulyk
2005/0063108	A1	3/2005	Voll et al.
2005/0073968	A1	4/2005	Perlman
2005/0076148	A1	4/2005	Chan et al.
2005/0078700	A1	4/2005	Thompson et al.
2005/0086389	A1	4/2005	Chang
2005/0097369	A1	5/2005	Bowser et al.
2005/0114325	A1	5/2005	Liu et al.
2005/0125083	A1	6/2005	Kiko
2005/0125507	A1	6/2005	Atias et al.
2005/0136972	A1	6/2005	Smith et al.
2005/0136989	A1	6/2005	Dove
2005/0150100	A1	7/2005	Merdan et al.
2005/0152306	A1	7/2005	Bonnassieux et al.
2005/0152323	A1	7/2005	Bonnassieux et al.
2005/0152337	A1	7/2005	Wurtzel et al.
2005/0177640	A1	8/2005	Rubinstein et al.
2005/0184915	A1	8/2005	Nagel et al.
2005/0201306	A1	9/2005	Engel
2005/0208825	A1	9/2005	Chan
2005/0228889	A1	10/2005	Cohen et al.
2005/0245127	A1	11/2005	Nordin et al.
2005/0268120	A1	12/2005	Schindler et al.
2005/0272372	A1	12/2005	Rodriguez
2005/0273790	A1	12/2005	Kearney, III et al.
2005/0281326	A1	12/2005	Yu
2006/0006817	A1	1/2006	Chason et al.
2006/0029210	A1	2/2006	Feugere
2006/0053324	A1	3/2006	Giat et al.
2006/0056444	A1	3/2006	Binder
2006/0079969	A1	4/2006	Seguin
2006/0089230	A1	4/2006	Biederman et al.
2006/0104291	A1	5/2006	Rodriguez et al.
2006/0165097	A1	7/2006	Caveney
2006/0168459	A1	7/2006	Dwelley et al.
2006/0181398	A1	8/2006	Martich et al.

OTHER PUBLICATIONS

"DOCSIS-Bridging Configuration, Chapter 2 Cisco uBR905/uBR925 Cable Access Router Software Configuration Guide", 1-10, Jul. 1, 2001.

Tanaka, Mosaoki, "High Frequency Noise Power Spectrum, Impedance and Transmission Loss of Power Line in Japan on Intrabuilding Power Line Communications" IEEE Transactions on Consumer Electronics , vol. 34, No. 2, pp. 321-326, May 1, 1988.

Barstow, J.M., "A Carrier Telephone System for Rural Service", AIEE Transcations, 1947, vol. 66, pp. 301-307, Jan. 1, 1947.

Wimer, W., "Clarifications and Extensions for the Bootstrap Protocol, Request for Comments 1542", Carnegie Mellon University, Oct. 1993, 1-23.

3COM, "48 Volt DC Power Supply Connection Guide for the SuperStack II Switch 3900", pp. 1-12, Mar. 1, 2000.

Cisco Systems, "Quick Start Guide: Cisco 2610 Router Cabling and Setup", 18 pages, Jan. 1, 1998.

"Release Notes for Cisco uBR904 Cable Access Router for Cisco IOS Release 12.0(7)T", Text Part No. 78-6482-04, 1-30, Dec. 13, 1999.

Hatori, Mitsutoshi et al, "Home Informatization and Standardization of Home Bus", IEEE Transactions on Consumer Electronics, CE-32, No. 3, pp. 542-549, Aug. 1, 1986.

Cervenka, Dana, "Building Cablephone Systems Piece by Piece", CED: Communications Engineering and Design, 6 pages, Mar. 1, 1996.

"Draft IS-60.04 Node Communications Protocol; Part 6: Application Layer Specification", 129 pages, Apr. 18, 1996.

"uBR900 Cable Modem Error Messages, Document ID: 43063", 1-5, Nov. 4, 2008.

"LonWorks Router User's Guide Revision 3", Echelon Corporation, 68 pages, Jan. 1, 1995.

"VISPLAN-10 Infrared Wireless LAN System"; JVC, 10 pages, May 1, 1996.

"PL DSK 2.1 Power Line Smart Transceiver Development Support Kit User's Guide", Echelon Corporation, 2005-2006, 18 pages, Jan. 1, 2005.

(56) **References Cited**

OTHER PUBLICATIONS

"Motorola CableComm CyberSURFR Cable Modem Specifications", 4 pages, Apr. 1, 1998.
Platt, Richard, "Why IsoEthernet Will Change the Voice and Video Worlds", IEEE Communications Magazine, vol. 34, Issue 4, Apr. 1996, 55-59.
"Marketing Assessment Presentation Entitled Powerline Telecommunications", 9 pages, Jul. 16, 2002.
Fanshawe, David G.J., "Architectures for Home Systems", Conference , IEEE Colloquium on Home Systems—Information, Entertainment and Control, London, United Kingdom, 4 pages, Oct. 1, 1990.
Sado, W.N. et al, "Personal Communicaitons on Residential Power Lines—Assessment of Channel Parameters"; Fourth IEEE International Conference , pp. 532-537, Nov. 6, 1995.
"DSLPipe Reference Guide"; by Ascend Communications, 162 pages, Jun. 2, 1997.
NetSpeed, "Speed Runner 202 Customer Premise ATM ADSL Router", 1-4, Jan. 1, 1997.
Serconet, Ltd., v. *Netgear, Inc*. Case No. CV-06-04646 PJH, Claim Comparison Chart for USP 7,035,280, 1-124, Jan. 29, 2007.
"Webstar TM DPX2203CTM and EPX2203C TM VOIP Cable Modem User'S Guide", 1-52, May 1, 2005.
"Intellon Corporation Test Summary for Transformerless Coupler Study", Intellon No News Wires, DOT/NHTSA Order No. DTNH22-98-P-07632, pp. 1-18, Dec. 24, 1998.
"Air Connect Access Point User Guide, Version 1.0", 1-90, Jan. 1, 2000.
"Quick Installation and Reference for the Model RPSU Redundant Power Supply Unit", Bay Networks, Sep. 1995, 1-15.
"The Mac Reborn; Macworld Sep. 1996", 104-115, Sep. 1, 1996.
"White Paper on Medium Voltage Powerline Communication (PLC) Networks" CIGRE SC D2 WG 14, Broadband PLC, pp. 1-58, Mar. 1, 2005.
Zakowski, Wayne A., "IEEE 802.9 Draft Standard Integrated Services (IS) LAN Interface at the MAC and PHY Layers (IEEE Unapproved Draft)", 1-502, Nov. 8, 1992.
"DPX2213 TM VOIP Cable Modem User'S Guide", 1-52, Aug. 1, 2006.
"IEEE 802.9, IEEE Standards for Local and Metropolitan Area Networks: Integrated Services (IS) LAN Interface at the Medium Access Control (MAC) and Physical (PHY) Layers, IEEE Standard 802.9", 1994, 437 pages.
"Using the LonWorks PLT-22 Power Line Transceiver in European Utility Application", Version 1, Echelon Coporation 1996-1999, 118 pages, Jan. 1, 1996.
Cisco Systems, "Cisco Catalyst 5000 Product Announcement : Industry's First Modular, Multilayer-Capable Switching System for the Wiring Closet", 22 pages, Jan. 1, 1996.
"Installing the Cisco uBR924 Router, Chapter 3, Cisco uBR924 Router Hardware Installation Guide", 1-16, Mar. 1, 2000.
"New and Changed Commands Reference, Appendix D", Cisco uBR905/uBR925 Cable Access Router Software Configuration Guide, 1-52, Jul. 1, 2001.
Onunga, J. et al, "Distribution Line Communications Using CSMA Access Control with Priority Acknowledgements" IEEE Transactions on Power Delivery, vol. 4, No. 2, pp. 878-886, Apr. 1, 1989.
Funkschau, "CEBus: US Households Are Being Networked", Funkschau, No. 9, 4 pages, Apr. 21, 1989.
3COM, "3ComImpact IQ External ISDN Modem User Guide", 158 pages, Jul. 1, 1997.
Mandeville, Robert et al, "Canned Heat: High Stress Tests Turn Up High-Speed Switches That Burn Through Backbone Bottlenecks", Data Communications of the Web, 10 pages, Feb. 1, 1996.
Na, "Universal Serial Bus Specification"—Rev.1.0 , Sec. 7.2.1-7.2.1.5 pp. 131-135, Jan. 15, 1996.
"LonWorks LPI-10 Link Power Interface Module User's Guide", Echelon Corporation, 37 pages, Jan. 1, 1995.
Lokken, G. et al, "The Proposed Wisconsin Electric Power Company Load Management System Using Power Line Carrier Over Distribution Lines", 1976 National Telecommunications Conference, IEEE , 21-12.2-3, Jan. 1, 1976.
"AT and T Practice, SLC 96 Subscriber Loop Carrier System, Remote Terminal Pair Gain Systems", Select Code 363-202-401, Issue 1, Feb. 1982, 506 pages.
"Series V: Data Communication Over the Telephone Network: Interface and Voiceband Modems", 74 pages, Oct. 1, 1996.
"Power Line Communications Solutions" Copyrgt 2002, 2 pages, Jan. 1, 2002.
RAD Data Comm. Ltd., "Token Ring Design Guide", #TR-20-01/94, chapters 1 through 4-21, Jan. 1, 1994.
"Demand Side Management with LonWorks Power Line Transceivers", LonWorks Engineering Bulletin, Echelon Corporation, 36 pages, Dec. 1, 1996.
"Ascend DSLPipe-S Specifications", 1997.
"HomePlug TM Powerline Alliance, HomePlug 1.01 Specification", 139 pages, Dec. 1, 2001.
"Upgrading Cisco I0S Software on a uBR900 Series Cable Modem, Document ID: 107613", 1-5, Sep. 26, 2003.
"White Paper on Medium Voltage Powerline Communication (PLC) Networks Annexes" CIGRE SC D2 WG 14, Broadband PLC, pp. 1-15, Apr. 1, 2005.
Cooper, Edward, "Broadband Network Technology—An Overview for the data and Telecommunications Industries", Sytek Systems, Mountain View CA, 4 pages, Jan. 1, 1984.
"DPR2325, EPR2325, DPR2320, and EPR2320 Cable Modem Gateway With Wireless Access Point User's Guide", 1-125, Aug. 1, 2006.
"JVC Introduces First Ethernet Compatible Wireless LAN System"; Business Wire, 1 page, Nov. 7, 1995.
Cisco Systems, "CiscoPro EtherSwitch CPW2115", 4 pages, Dec. 1, 1995.
"Intelogis to Present on Stage at Internet Showcase 1998" PR Newswire, 1 pages, Jan. 28, 1998.
"Deliver Secure, High-Speed DOSCSIS Data and Voice Commercial Services With the Cisco uBR900 Series Cable Access Router Data Sheet", 1-4, Sep. 1, 2001.
Hunt, John M. et al, "Electrical Energy Monitoring and Control System for the Home" IEEE Transactions on Consumer Electronics, vol. CE-32, No. 3, pp. 578-583, Aug. 1, 1986.
"Advanced Data-Only Configurations, Chapter 3", Cisco uBR905/uBR925 Cable Access Router Software Configuration Guide, 1-16, Jul. 1, 2001.
"Cisco 1805 DOCSIS 2.0 Cable Router, Quick Start Guide", 1-4, Jan. 1, 2007.
Stallings, William, Local Networks (Third Edition), 1990, 1-534.
Liu, Er et al, "Broadband Characterization of Indoor Powerline Channel", Communications Laboratory , Helsinki Univeristy of Technology, Finland (presented at the 2004 International Symposium on PowerLine Communications and its Applications, Zaragoza, Spain,), 6 pages, Mar. 31, 2004.
Lim, C. K. et al, "Development of a Test Bed for High-Speed Power Line Communications", School of Electrical and Electronic Egineering, Nanyang Technological University, Singapore, IEEE, pp. 451-456, Jan. 1, 2000.
Coakley, N.G. et al, "Real-Time Control of a Servosystem Using the Inverter-Fed Power Lines to Communicate Sensor Feedback", IEEE Transactions on Industrial Electronics, pp. 360-369, Jan. 1, 1999.
Horowitz, Paul et al, "Art of Electronics", Second Edition, Cambridge University Press, 1989, pp. 1-1153.
International Telecommunication Union, "ISDN User-Network Interfaces—Reference Configurations", I.411, Mar. 1993, 11 pages.
"SuperStack II Baseline Switch User Guide", 3Com, 8 pages, Mar. 1, 1998.
"LonWorks for Audio Computer Control Network Applications", Echelon Corporation, 30, Jan. 1, 1995.
Inoue, M et al, "The Melon Home Automation Housekeeping System", Mitsubishi Denki Giho, vol. 63, No. 2, pp. 36-41, Jan. 1, 1989.
Burranscano, P et al, "Digital Signal Transmission on Power Line Carrier Channels: An Introduction", IEEE Transactions on Power Delivery, vol. PWRD-2, No. 1, pp. 50-56, Jan. 1, 1987.

(56) **References Cited**

OTHER PUBLICATIONS

Hoe-Young, Noh, "Home Automation", Korea Information Science Society Review, vol. 7 No. 2 pp. 40-44, Republic of Korea., 1-14, Apr. 1, 1989.
"LonWorks 78kbps Self-Healing Ring Architecture", LonWorks Marketing Bulletin, Echelon Coporation, 6 pages, Aug. 1, 1993.
"Texas Instruments: System Block Diagrams; Power Line Communication (Generic)", Copyrgt 1995-2002, 1 page, Jan. 1, 1995.
"IEEE 802.1D, IEEE International Standard: Information Technology—Telecommunications and Information Exchange Between Systems—Local Area Networks—Media Access Control (MAC) Bridges", 181 pages, Jul. 8, 1993.
"Universal Serial Bus Specification Revision 1.0" pp. 29-30, Sec 4.2.1, Jan. 15, 1996.
"*Serconet LTD* V *Netgear Inc*" Case No. CV-06-04646 PJH Claim Comparison Chart for USP 7,016,368, 1-105, Jan. 29, 2007.
"Ethernet Wireless LAN Systems"; BYTE, 3 pages, Feb. 1, 1996.
"Dedicated Passive Backbone for Power Line Communications", IBM Technical Disclosure Bulletin, pp. 183-185, Jul. 1, 1997.
Adaptive Networks, Inc., "AN1000 Powerline Network Communications Chip Set", 1-29 pages, Jan. 1, 1995.
3COM, "3Com NBX 2101 PE Basic Phone Product Details", pp. 1-3, Jan. 18, 2007.
Wakerly, John F., A Voice/Data/Packet Switching Architecture, David Systems, Inc., 1985, 6 pages.
"Overview, Chapter 1", Cisco uBR905/uBR925 Cable Access Router Software Configuration Guide, 1-18, Jul. 1, 2001.
Azzam, Albert A., High-Speed Cable Modems, pp. 247-570, ISBN: 0-07-006417-2, 1-321, Jan. 1, 1997.
Media Access Control (MAC) Parameters, Physical Layer, Medium Attachment Units, and Repeater for 100 Mb/s Operation, Type 100BASE-T (Clauses 21-30); IEEE Standards for Local Metropolitan Area Networks: Supplement to Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications; 1995, 200 pages.
"IEEE P802.9af, Draft Standard for Local and Metropolitan Area Networks—Supplement to Integrated Services (IS) LAN Interface at the Medium Access Control (MAC) and Physical (PHY) Layers", 1997, 1-34.
"Claim Chart presented in request for reexamination of U.S. Patent No. 6,480,510 request filed", Jun. 10, 2009.
"Beginners FAQ for uBR900 Series Cable Modem End Users, Document ID: 14561", 1-2, Oct. 31, 2008.
"David Information Manager Technical Overview", Sep. 1988, pp. 1-74.
"AT and T Practice, SLC 24 and 96 Carrier Systems, Channel Unit Installation, Loop Transmission Systems", Select Code 363-202-402, Issue 2, Jul. 1985, 335 pages.
Droms, R., "Dynamic Host Configuration Protocol (DCHCP) Request for Comments 1531", Bucknell University, Oct. 1993, 1-40.
"Signalling on Low-Voltage Electrical Installations in the Frequency Band 3kHz to 148.5 kHz-Part 4: Filters at the Inferface of the Indoor and Outdoor Electricity Network", CLC SC 105A (Secretariat), pp. 1-11, May 1, 1992.
Campbell, Chris, "Building a Business Case for PLC: Lessons Learned From the Communication Industry Trenches", KPMG Consulting, 5 pages, Jul. 16, 2002.
"HiGain Remote Unit, Engineering Services Technical Practice Section 150-412-181-01, Revision 01", 42 pages, Mar. 31, 1998.
"Introduction to Pyxos FT Platform", Echelon Corporation 2007, 34 pages, Jan. 1, 2007.
Gunnerson, Gary, "Switching Hubs-Switching to the Fast Track", PC Magazine, 24 pages, Oct. 11, 1994.
Plexeon Logistics, Inc. "Power Line Communications", Copyrgt 1998-2003, 2 pages, Jan. 1, 1998.
Heite, C et al, "Powernet-Das Neue Eib-Medium", Elektrotechnik und Informationstechnik, Spinger Verlag, Wein, AT, vol. 114,. No. 5, pp. 254-257, Jan. 1, 1997.
"HomePlug TM Powerline Alliance, HomePlug 0.5 Draft Medium Interface Specification", 133 pages, Nov. 28, 2000.
Cisco Systems, "Cisco Catalyst 5000: Industry's First Modular, Multilayer-Capable Switching System for the Wiring Closet" , pp. 1-22, May 16, 1996.
"IP Addressing on the Workgroup Catalyst 1200 Series", cisco.com, Aug. 1995, 1-2.
Esmailian, T. et al, "A Discrete Multitone Power Line Communications System", Department of Electrical and Computer Engineering, University of Toronto, Ontario, Canada, 2000 IEEE, pp. 2953-2956, Jan. 1, 2000.
"Universal Serial Bus Specification Revision 1.0." Sec. 9.6.2 pp. 184-185, Jan. 15, 1996.
Fogarty, Kevin, "Zap! NetWare users get really wired—over electric power lines", Network World. , 1-2, Jul. 3, 1995.
"Embedded Power Line Carrier Modem", Archnet Electronic Technology, Copyrgt 2001, 3 pages, Jan. 1, 2001.
Hogan Lovells US LLP, "U.S. ITC Complaint in the Matter of Certain Equipment for Communications Networks, Including Switches, Routers, Gateways, Bridges, Wireless Access Points, Cable Modems, IP Phones and Products Containing Same", 1-59, May 13, 2011.
"uBR900 Cable Modem Performance Issues, Document ID: 43062", 1-5, Oct. 31, 2008.
"*Cisco Systems, Inc.* v. *Mosaid Technologies Inc.*—Complaint for Declaratory Judgement" (full version of the Complaint having been filed under seal and thus unavailable to the public), 23 pages, Aug. 16, 2010.
Kim, Woo-Seop et al, "A Control Network Architecture Based on EIA-709.1 Protocol for Power Line Data Communications", IEEE Transactions on Consumer Electronics, vol. 48, No. 3 , pp. 650-655, Aug. 1, 2002.
Sheets, William et al, "Carrier Current Audio Transmitter", Radio Electronics, 5 pages, Jan. 1, 1989.
"SuperStack II Entry Hub User Guide", 3Com, pp. 1-8, Nov. 1, 1996.
SX-200 Digital PABX/General Description 9109-094-100-NA, Issue 4, Revision 1, pp. 1-46, Nov. 1, 1990.
Ascend Communications, Inc., "Ascend DSLPipe-S Features", 2 pages, May 12, 1997.
"PassPort PC Plug in Quick Setup Guide", Intelogis P/N 30030202, 1998, 8 pages.
"ITU-T 1.430 Integrated Services Digital Network—Basic User-Network Interface—Layer 1 Specification.", 1-106, Jan. 1, 1996.
SX-200 Digital and SX-200 Light PABX, General Information Guide Lightware 15, 9109-952-006-NA, Issue 1, Revision 0, pp. 1-222, Mar. 1, 1992.
Bell, Robert, IEEE P802.9F Draft Standard for Local and Metropolitan Area Networks—Supplement to Integrated Services (IS) LAN Interface at the Medium Access Control (MAC) and Physical (PHY) Layers, Nov. 1996, pp. 1-22.
"Universal Serial Bus Specification", Revision 1.0, 268 total pages, Jan. 15, 1996.
Eldering, Charles et al, "Engineering Requirements for Hybrid Fiber—Coax Telephony Systems", 1994 National Cable Television Association Show, May 1994, 219-231.
Mandeville, Robert et al, "Forget the Forklift", Data Communications, 11 pages, Sep. 1, 1996.
International Telecommunication Union, "ISDN User-Network Interfaces—Interface Structures and Access Capabilities", I.412, 1988, 7 pages.
"Release Notes for Cisco uBR904 Cable Access Router for Cisco IOS Release 11.3NA", Text Part No. 78-5546-09, 1-22, Aug. 9, 1999.
"End of Sales, Engineering, and Life for the Cisco uBR924 Cable Access Router", 1-4, Jul. 11, 2001.
"*Serconet LTD* V *Netgear Inc*" Case No. CV-06-04646 PJH, Claim Comparison Chart for USP 6,480,510, 1-37, Jan. 29, 2007.
"Compaq Deskpro 4000S Series of Personal Computers", 1-133, Jul. 1, 1997.
Bell, Robert, "IEEE Standards Project, P802.9F Draft Standard for Local and Metropolitan Area Netoworks—Supplement to Integrated Services (IS) LAN Interface at the Medium Access Control (MAC) and Physical (PHY) Layers", 1-34, Jul. 8, 1997.
Serconet, Ltd., v. *Netgear. Inc*. Case No. CV-06-04646 PJH, Defendant's Invalidity Contentions, 1-15, Jan. 29, 2007.

(56) **References Cited**

OTHER PUBLICATIONS

"IEEE 802.9A, IEEE Standards for Local and Metropolitan Area Networks: Supplement to Integrated Services (IS) LAN Interface at the Medium Access Control (MAC) and Physical (PHY) Layers: Specification of ISLAN16-T", 344 pages, Feb. 16, 1996.
Rivkin, Steven R, "Co-Evolution of Electric and Telecommunications Networks", The Electricity Journal , pp. 71-76, May 1, 1998.
LAN Emulation, 16 pages, Nov. 15, 1995.
SX-200 Digital PABX/Circuit Card Descriptions 9109-094-125-NA, Issue 4, Revision 1, pp. 1-48, Nov. 1, 1990.
"Setting up MacIP", cisco.com, May 1995, 1-6.
Oneal Jr., J.B., "The Residential Power Circuit as a Communication Medium", IEEE Transactions on Consumer Electronics, vol. CE-32, No. 3, pp. 567-577, Aug. 1, 1986.
"SuperStack II PS Hub User Guide"; 3Com, 188 pages, Jul. 1, 1997.
Feduschak, Natalia A., "Waiting in the Wings: Is Powerline Technology Ready to Compete with Cable?", 5 pages, Mar. 1, 2001.
Amada, Eiichi et al, "An Integrated PABX/LAN System Architecture", Communications, 1988, ICC ' 88, Digital Technology—Spanning the Universerse, Conference Record, IEEE International Conference, vol. 3., Jun. 1988, 1533-1538.
International Telecommunication Union, "ISDN User-Network Interfaces—Basic User-Network Interface—Layer 1 Specification", I.430, Mar. 1993, 106 pages.
"Connector and Cable Specifications, Appendix B, Cisco uBR924 Router Hardware Installation Guide", 1-6, Mar. 1, 2000.
Chang, S.S.L., "Power-Line Carrier", Fundamentals Handbook of Electrical and Computer Engineering, vol. II Communication, Control, Devices and Systems, John Wiley and Sons, New York, pp. 617-627, Jan. 1, 1983.
De Wilde, W.R. et al, "Upwards to a Reliable Bi-Directional Communication Link on the LV Power Supplies for Utility Services: Field Tests in Belgium", Sixth International Conference, pp. 168-172, Apr. 3, 1990.
Yoshitoshi, M et al, "Proposed Interface Specifications for Home Bus", IEEE Transactions on Consumer Electronics, vol. CE-32, No. 3, pp. 550-557, Aug. 1, 1986.
Naredo, J.L et al, "Design of Power Line Carrier Systems on Multitransposed Delta Transmission Lines" IEEE Transactions on Power Delivery. vol. 6. No. 3, pp. 952-958, Jul. 1, 1991.
-, "Technical Report TR-001 ADSL Forum System Reference Model", 6 pages, May 1, 1996.
"AT and T Practice, SLC 96 Carrier System, Maintenance Pair Gain System", Select Code 363-202-500, Issue 1, Aug. 1983, 497 pages.
Cisco Systems, Inc., Respondents' Notice of Prior Art (Redacted); in the Matter of Certain Equipment for Communications Networks, Including Switches, Routers, Gateways, Bridges, Wireless Access Pointes, Cable Modems, IP Phones and Products Containing Same; ITC Investigation No. 337-TA-778, 86 pages, Aug. 12, 2011.
"IEEE Guide for Power-Line Carrier Applications, ANSI/IEEE Std 643-1980", Copyrgt 1980 by The Institute of Electrical and Electronics Engineers, Inc. , pp. 1-84, Jan. 1, 1980.
"SuperStack II Desktop Switch", 3Com, 1-2, Sep. 1, 1996.
Summary of an IEEE Guide for Power-Line Carrier Applications, A Report by the Power System Communications Committee, IEEE Transactions on Power Apparatus and Systems, vol. PAS-99, No. 6, pp. 2334-2337, Nov. 1, 1980.
"Configuring the uBR900 Series Modem, Document ID: 43060", 1-11, Oct. 31, 2008.
"Motorola Announces Key New Features to CyberSURFR Cable Modem System", Motorola, 3 pages, Mar. 17, 1997.
"PL3120/PL3150 Power Line Smart Transceiver Data Book", Version 2, Echelon Corporation, 1996-2005, 255 pages, Jan. 1, 1996.
"Superstack II Baseline Switch 610 User Guide", 3Com, pp. 1-54, May 1, 1999.
Hasler, E.F. et al, "Communication Systems Using Bundle Conductor Overhead Power Lines", IEEE Transactions on Power Apparatus and Systems, vol. PAS-94, No. 2, pp. 344-349, Mar. 1, 1975.
Wakerly, John F. et al, "Attaching RS-232 and LAN Capabilities to an Existing Voice-Only Switching Network", published as early as 1985, pp. 1-11.
Adaptive Networks, Inc., "AN1000EVK Evaluation Unit Manual, Draft 1.0", 31 pages, Aug. 1, 1996.
Burr, A.G, et al, "Effect of HF Broadcast Interference on PowerLine Telecommunications Above 1 MHZ" Copyrgt 1998 IEEE, pp. 2870-2875, Jan. 1, 1998.
Burranscano, P et al, "Performance Evaluation of Digital Signal Transmission Channels on Coronating Power Lines"Copyrgt 1988 IEEE, pp. 365-368, Jan. 1, 1988.
Shimizu, Hiroshi et al, "IVDLAN Standardization and Development", IEICE Transactions on Communications, vol. E74-B, No. 9, Sep. 1991, 2696-2702.
SX-200 Digital PABX/Features Description 9109-094-105-NA, Issue 4, Revision 1, pp. 1-350, Nov. 1, 1990.
Gutzwiller, F.W. et al, "Homenet: A control Network for Consumer Applications", IEEE Transactions on Consumer Electronics, vol. CE-29, No. 3, pp. 297-304, Aug. 1, 1983.
Cisco Systems, "Catalyst 5000 ATM Dual PHY LAN Emulation Module", pp. 1-4, Sep. 24, 1996.
Okazaki, Hideaki et al, "A Transmitting and Receiving Method for CDMA Communications Over Indoor Electrical Power Lines", IEEE, pp. 522-528, Mar. 1, 1998.
Kosiur Dave et al, "Macworld Networking Bible", Second Edition, pp. 1-331, Jan. 1, 1994.
Brightfield, Keith, Power Line Communications Conference Entitled, "PLC, A New Competitor in Broadband Internet Access", Washington DC, 60 pages, Dec. 11, 2001.
"End-Of-Sale and End-Of-Life Announcement for the Cisco 1841 DOCSIS 2.0 Cable Modem Bundles", 1-2, Dec. 1, 2008.
Cervenka, Dana, Cablephone Not Ringing Yet; CED: Communications Engineering and Design, Mar. 1995, pp. 32, 33, 34, 36, 38, 40 and 42.
Held, Gilbert, "High Speed Networking with LAN Switches"pp. 1-290, Jan. 1, 1997.
"DPC2203 and EPC2203 VOIP Cable Modem User'S Guide", 1-58, Oct. 1, 2006.
"Continuation of IBM LAN Bridge and Switch Summary", Jan. 1996, 1-70.
Chen, Y.F. et al, Baseband Transceiver Design of a 128-Kbps Power-Line Modem for Household Applications, IEEE Transactions, 17 (2), 338-344, Apr. 1, 2002.
Piety, Robert A., "Intrabuilding Data Transmission Using Power-Line Wiring", Hewlett-Packard Journal, pp. 35-40, May 1, 1987.
"SuperStack II Desktop Switch User Guide"; 3Com, 148 pages, Jun. 1, 1997.
Cisco Systems, Catalyst 5000 Group Switching Ethernet Modules, 5 pages, May 6, 1996.
"Hardware Troubleshooting for Cisco uBR9XX Series Cable Modems, Document ID: 10154", 1-3, Oct. 4, 2005.
Metcalfe, Bob, From the Ether-Bob Mecalfe, Cheap, reliable 'net connections may be as close as an electrical socket, by Bob Metcalfe Info World, vol. 19, Issue 6, 4 pages, Feb. 10, 1997.
Fausti, A. et al, "Remote Powered Data Transmission System, Telecommunications Energy Conference", Intelec ' 89, Conference Proceedings, Eleventh International, vol. 2, Oct. 1989, 1-5.
N/A, "SuperStack II Baseline 10/100 Switch User Guide", 3Com, pp. 1-8, May 1, 1998.
"Cisco Model DPC2607 and EPC2607 Channel-Bonded EMTA User Guide", 1-51, Feb. 1, 2008.
"IBM LAN Bridge and Switch Summary", Jan. 1996, 208 pages.
Mitel, ISO-CMOS ST-BUS Family, MT8971B/72B; Digital Subscriber Interface Circuit/Digital Network Interface Circuit; Issue 7, p. 1-21, May 1, 1995.
"Cisco Systems, Inc., Cisco Consumer Products LLC, Scientific-Atlanta LLD, and Cisco Systems International B.V.'S Response to Complaint of Mosaid Technologies Inc., Response to Complaint", Investigation No. 337-TA-778, 1-72, Jul. 21, 2011.
Evans, Grayson , "The CEBus Standard Users Guide, 1st Edition", 317 pages, pp. 1-317, May 1, 1996.
"David Co-Net Command Reference, Revision A, Doc No. 7915-08", 1-342, Dec. 1, 1988.
"EMETCON Automated Distribution System: Communications Guide", Westinghouse ABB Power T7D Company Technical Manual 42-6001A, 55 pages, Sep. 1, 1989.

(56) **References Cited**

OTHER PUBLICATIONS

Abraham, K.C. et al, "A Novel High-Speed PLC Communication Modem", IEEE Transactions on Power Delivery, pp. 1760-1767, Oct. 1, 1992.

David Systems, David Information Manager—Overview, 1986, pp. 1-38.

International Telecommunication Union, "ISDN User-Network Interface Data Link Layer—General Aspects", CCITT, Q.920, Nov. 1988, 20 pages.

Meng, H. et al, "A Transmission Line Model for High—Frequency Power Line Communication Channel" IEEE, pp. 1290-1295, Jan. 1, 2002.

"Ascend Pipeline 25 ISDN Remote LAN Access, Bandwidth on Demand, Getting Started Guide", 111 pages, Aug. 18, 1995.

Held, Gilbert, "The Complete Modem Reference: The Technician's Guide to Installation, Testing, and Trouble-Free Communications", Third Edition, pp. 1-488, Jan. 1, 1997.

Echelon Corporation, "Centralized Commercial Building Applications with the LonWorks PLT-21 Power Line Transceiver", LonWorks Engineering Bulletin, Echelon Corporation, 22 pages, Apr. 1, 1997.

Kosiur Dave,et al, "Macworld Networking Bible", Second Edition, pp. 332-687, Jan. 1, 1994.

"HomePlug.TM.Powerline Alliance, HomePlug Initial Draft Medium Interface Specification", 104 pages, Jul. 27, 2000.

"Data Xcellerator Cable Modem User'S Guide", 1-46, Apr. 1, 1997.

Cisco Systems, "Catalyst 5000 ATM LAN Emulation Module: Data Sheet", 2 pages, Nov. 1, 1995.

"Recall, End of Sales, End of Engineering and End of Life for Cisco uBR914 Cable Data Service Unit, Product Bulletin, No. 1380", 1-2, Aug. 1, 2001.

Wakerly, John, TSBUS Signal Specifications, Rev. 4; D.A.V.I.D. Systems, Inc., pp. 1-8, May 7, 1985.

Kawamura, A et al, "Autonomous Decentralized Manufacturing System Using High-Speed Network with Inductive Transmission of Data and Power", IEEE , pp. 940-945, Jan. 1, 1996.

"Fast Ethernet 100 Mbps Solutions", Posted March, 10 pages, Mar. 1, 1996.

Cisco Systems, "Cisco Catalyst 5002 Switching System", 1999, 4 pages.

"Preface, Cisco uBR905/uBR925 Cable Access Router Software Configuration Guide", 1-12, Jul. 1, 2001.

"Miscellaneous Questions About uBR900 Series Cable Modems, Document ID: 107616", 1-3, Oct. 31, 2008.

Perlman, Radia, "Interconnections Bridges and Routers", ISBN: 0-201-56332-0, 393 pages, Jan. 1, 1992.

"Model DPX203TM and EPX2203 TM VOIP Cable Modem User'S Guide", 1-51, Aug. 1, 2006.

Wakerly, John, TNIM Timeslot Allocation; D.A.V.I.D. Systems, Inc., pp. 1-3, Apr. 18, 1983.

"Cisco uBR900 Series Cable Access Router Q and A, Revision 1", 1-5, Nov. 15, 2001.

Markwalter, Brian E. et al, CEBus Router Testing, IEEE Transactions on Consumer Electronics, vol. 37, No. 4, 8 pages, Nov. 1, 1991.

Suranyi, Gabriel G., "The Need for Home Power: It Is Just Around the Corner", Telecommunications Energy Conference, INTELEC, 19th International, Oct. 1997, 80-86.

Network Based Exchange—The Complete Communications Solution, NBX Corporation, 16 pages, Jan. 1, 1997.

"JVC Introduces Ethernet Compatible Wireless LAN System"; Business Wire, 1 page, Sep. 25, 1995.

Archnet Technology Ltd., "Archnet: Automatic Meter Reading System Power Line Carrier Communication", 3 pages, Jan. 1, 2001.

Nichols, Keith, "Line Carrier Modems—1: Build a Pair of Line-Carrier Modems (Part 1)", Radio Electronics , 7 total pages, Jul. 1, 1988.

Nichols, Keith, "Line Carrier Modems—2: Build a Pair of Line-Carrier Modems (Part 2)", Radio Electronics , 5 total pages, Aug. 1, 1988.

Ross, Floyd E. et al, "IsoEthernet: An Integrated Services LAN", IEEE Communications, vol. 34, Issue 8, Aug. 1996, 74, 79-84.

Dostert, Klaus, "Powerline Communications" Ch. 5, Prentice Hall PTR, Upper Saddle River NJ Copyrgt 2001, pp. 286, 288-292, Jan. 1, 2001.

Echelon Corporation, "Building a Lon Talk-to-PLC Gateway", Lon Works Engineering Bulletin, 1-63, May 1, 1994.

"LTM-10A User's Guide", Revision 4, Echelon Coporation, 1995-2001, 46 pages, Jan. 1, 2010.

"The Mac Reborn", Macworld, vol. 13, Issue 9., pp. 1-10, Sep. 1, 1996.

"Using Cisco Ios Software, Appendix A", Cisco uBR905/uBR925 Cable Access Router Software Configuration Guide, 1-12, Jul. 1, 2001.

Kong, Isaac et al, "Cablenet: A Local Area Network Reservation Scheme", Digest of Papers Spring Compcon 82, High Technology in the Information Industry, IEEE Computer Society International Conference, Feb. 22, 1982.

Bearfield, J.M., "Control the Power Interface of USB's Voltage Bus", Electronic Design, U.S. Penton Publishing, Clev. Ohio, vol. 45, No. 15, pp. 80, 82, 84 and 86, Jul. 1, 1997.

"Using the Cable Monitor Tool, Appendix B", Cisco uBR905/uBR925 Cable Access Router Software Configuration Guide, 1-24, Jul. 1, 2001.

Tanaka, Masaoki, "Transmission Characteristics of a Power Line Used for Data Communications at High Frequencies", IEEE Transactions on Consumer Electronics, vol. 35, No. 1, pp. 37-42, Feb. 1, 1989.

IEEE Standard for a High Perfomance Serial Bus; IEEE Std. 1394-1995, 392 pages, Jul. 22, 1996.

International Telecommunication Union, "ISDN User-Network Interface Data Link Layer Specification"CCITT, Q.921, Nov. 1988, 118 pages.

Hachman, Mark, "Compaq to Ride the CEBus", EBN, 1 page, Jan. 22, 1996.

"LonWorks LPT-10 Link Power Transceiver User's Guide Version 2.1", Echelon Corporation, 60 pages, Jan. 1, 1995.

Drudy, Francis, "Considerations and Recommendations on Power Feeding at AN 802.9", IEEE 802.9—IVD LAN Interface Working Group, Reference IEEE 802.87*9.618, 1-6, Nov. 5, 1987.

Hofman, J., "Cable, Television, and the Consumer Electronic Bus":, Panasonic Technologies Inc., 9 Pages, Jun. 11, 1987.

"Connectivity Problems for uBR900 Cable Modems, Document ID: 43061", 1-5, Oct. 31, 2008.

"David Information Manager System Description Manual, Revision A", 1-114, Mar. 1, 1987.

"US Robotics Courier V. Everything External Modem—Getting Started Guide", 1-64, Apr. 1, 1996.

Azzam, Albert A., High-Speed Cable Modems, pp. 1-246, ISBN: 0-07-006417-2, 1-276, Jan. 1, 1997.

Marthe, Emmanuel et al, "Indoor Radiated Emission Associated with Power Line Communication Systems", Swiss Federal Institute of Technology Power Systems Laboratory IEEE , pp. 517-520, Jan. 1, 2001.

"Technical Specifications, Appendix A, Cisco uBR924 Router Hardware Installation Guide", 1-6, Mar. 1, 2000.

"HomePlug TM Powerline Alliance, HomePlug Initial Draft Medium Interface Specification", 111 pages, May 19, 2000.

"Hart Field Communication Protocol—an introduction for users and manufacturers", Hart Communication Foundation, 12 pages, Oct. 1, 1995.

Cisco Systems, "Catalyst 5000 Switching System", 1996, pp. 1-4.

Strassberg, Dan, "Home Automation Buses", Protocols Really Hit Home, EDN, 1-9, Apr. 13, 1995.

Russell, B. Don, "Communication Alternatives for Distribution Metering and Load Mangement", IEEE Transactions on Power Apparatus and Systems, vol. PAS-99, No. 4, pp. 1448-1455, Jul. 1, 1980.

"Cable Hardware and Software: uBR7200, uBR7100, uBR1OK, uBR905 FAQ, Document ID: 63990", 1-5, Sep. 3, 2006.

Hiroshi, Takeda, "Patent Abstracts of Japan", Japanese Publication No. 10200544 A2, (Matsushita Electric Works, Ltd.), 1, Jul. 31, 1998.

(56) **References Cited**

OTHER PUBLICATIONS

"Claim Chart presented in request for reexamination of U.S. Patent No. 5,841,360 request filed", 53 pages, May 26, 2009.
Diclementi, Domenic A. et al, "Electrical Distribution System Power Line Characterization" Copyrgt 1996, IEEE, pp. 271-276, Jan. 1, 1996.
International Telecommunication Union, "ISDN User-Network Interfaces—Primary Rate User-Network Interface—Layer 1 Specification", I.431, Mar. 1993, 44 pages.
"Tohoku Electric Develops High-Speed Communications System Using Power Distribution Lines" Tohoku Currents, Spring 1998, 8(1) , 2 pages, Jan. 1, 1998.
3COM, "3ComImpact IQ External ISDN Modem User product brochure", pp. 1-4, Jun. 1, 1996.
"PowerDsine Product Catalogue" Israel, pp. 56-79 and 95-105, Jan. 1, 1999.
LonWorks Custom Node Development, LonWorks Engineering Bulletin, Echelon Corporation, 16 pages, Jan. 1, 1995.
Platt, Richard, "New Standard Helps Multimedia Get Off the Ground", IEEE Multimedia, vol. 3, Issue 2, Summer 1996, 78-82.
Dostert, K, "EMC Aspects of High Speed Powerline Communications", Proceedings of the 15.sup.th International Wroclaw Symposium and Exhibition on Electromagnetic Capability, Wroclaw, Poland, pp. 98-102, Jun. 27, 2000.
"Universal Serial Bus Specification Revision 1.0."Sec. 9.2.1-9.2.5.1 pp. 170-171, Jan. 15, 1996.
Cisco, "Cisco Catalyst 5000 Family Fast EtherChannel Switching Modules Data Sheets", 3 pages, Jan. 1, 1999.
"LonWorks Twisted Pair Control Module User's Guide Version 2", Echelon Corporation, 1992-1996, 50 pages, Jan. 1, 1996.
Ulm, John et al, Data-Over-Cable Interface Specifications/Radio Frequency Interface Specification, SP-RFII01-970326, 1-189, Mar. 26, 1997.
Wakerly, John, Clock Synchronization of DAVID Managers, D.A.V. I.D. Systems, Inc., pp. 1-8, Mar. 6, 1985.
"EMETCON Automated Distribution System, ABB Power T and D Company Inc.", Raleigh North Carolina, No. B-919A, 14 pages, Jan. 1, 1990.
United States International Trade Commission, Order No. 21: Construing the Terms of the Asserted Claims of the Patents at Issue (Public Version); In the Matter of Certain Equipment for Communications Networks, Including Switches, Routers, Gateways, Bridges, Wireless Access Points, Cable Modems, IP Phones, and Products Containing Same; ITC Investigation No. 337-TA-778, 148 pages, Feb. 14, 2012.
Dougligeris C. et al, "Communications and Control for a Home Automation System", Conference IEEE Proceedings of the Southeastcon '91, vol. 1, pp. 171-175, Jan. 1, 1991.
"DSLPipe User's Guide"; by Ascend Communications, 245 pages, Jun. 3, 1997.
"Serconet Ltd V Netgear Inc" Case No. CV-06-04646 PJH, Order Construing Claims, 1-27, Jul. 30, 2007.
Kilbourne, B, "EEI Electric Perspectives: The Final Connection", 7 pages, Jul. 1, 2001.
"Troubleshooting Tips for the Cisco uBR924 Cable Access Router, Cisco IOS Release 12.0(5) T", 1-74.
"Bridging and Routing Features for the Cisco uBR904 Cable Modem", 1-27.
"Cisco IOS Software Releases 12.0T Configuring the Cisco uBR900 Series Cable Access Routers", 1-103.
"Bridging and Routing Features for the Cisco uBR904 Cable Modem, Cisco IOS Release 12.0(3) T", 1-38.
Cisco Systems, "Catalyst 5000 Series", Cisco Systems, pp. 589-600, 1996.
"Troubleshooting Tips for the Cisco uBR904 Cable Modem, Cisco IOS Release 12.0(3)T", 1-62.
"Cisco 1-Port Euro/J-Docsis Cable High-Speed WAN Interface Card, Docsis Integration for Select Cisco Devices", 1-2.
Horowitz, Paul et al., Art of Electronics, Second Edition, Cambridge University Press, 1989, pp. 44, 45, 47, 48, 316-319.
"Troubleshooting Tips for the Cisco uBR904 Cable Modem", 1-39.

* cited by examiner

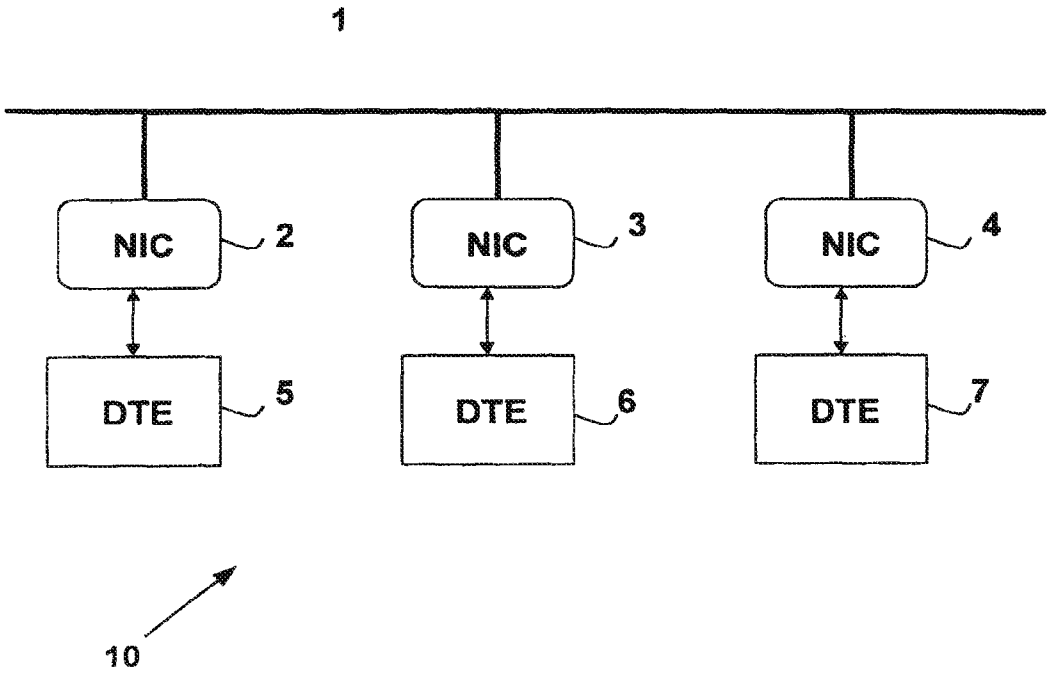

FIG. 1. (PRIOR ART)

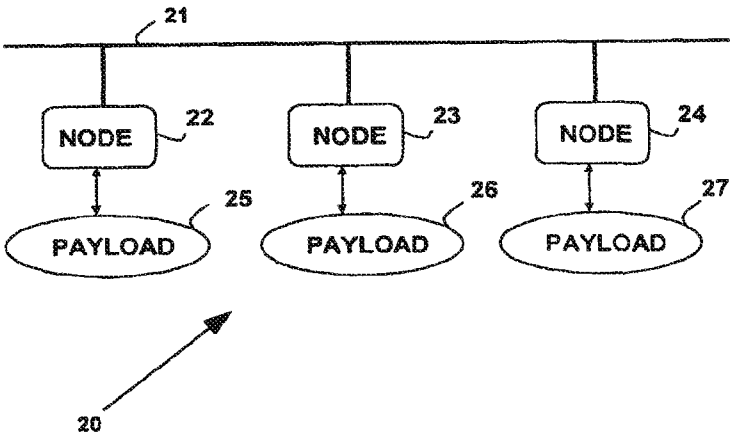

FIG. 2. (PRIOR ART)

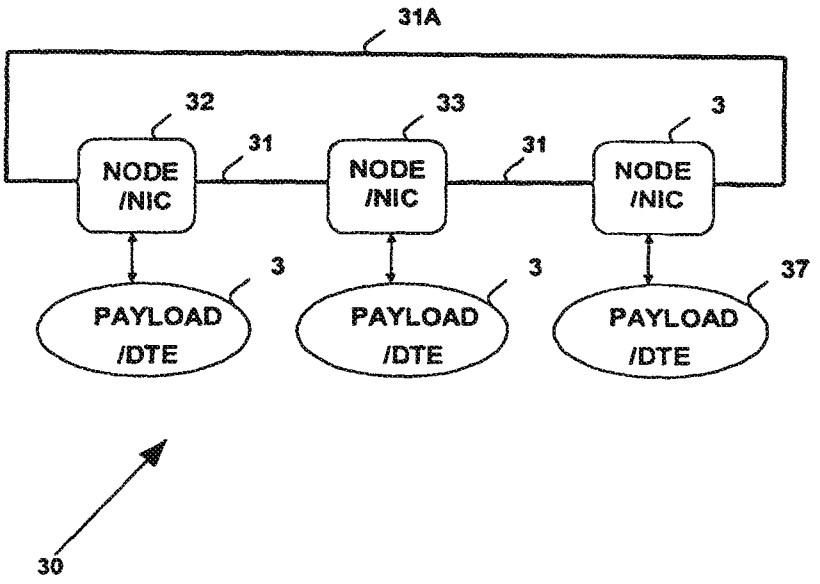

FIG. 3. (PRIOR ART)

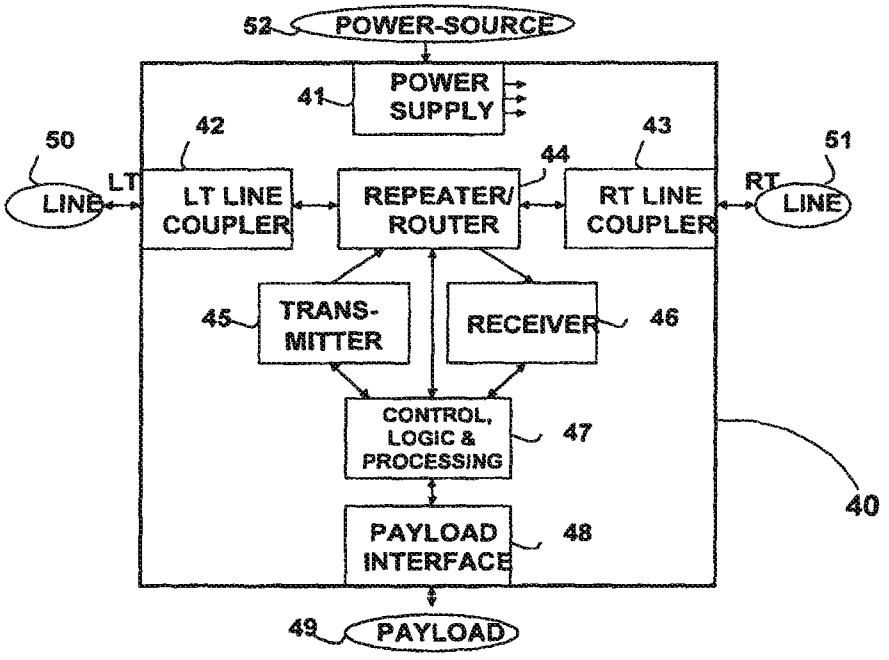

FIG. 4.

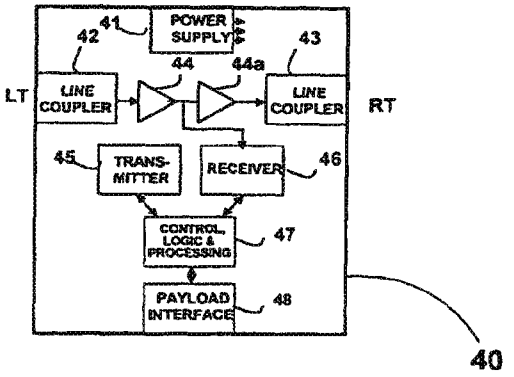

FIG. 5a.

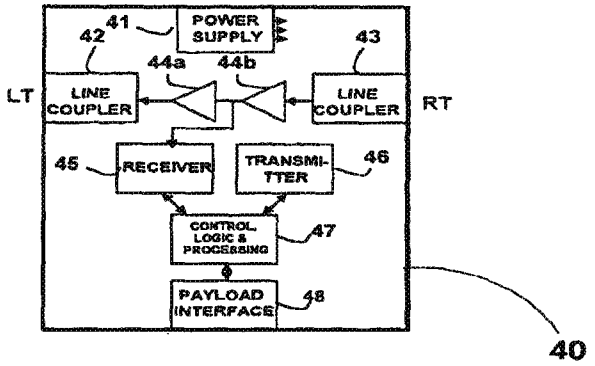

FIG. 5b.

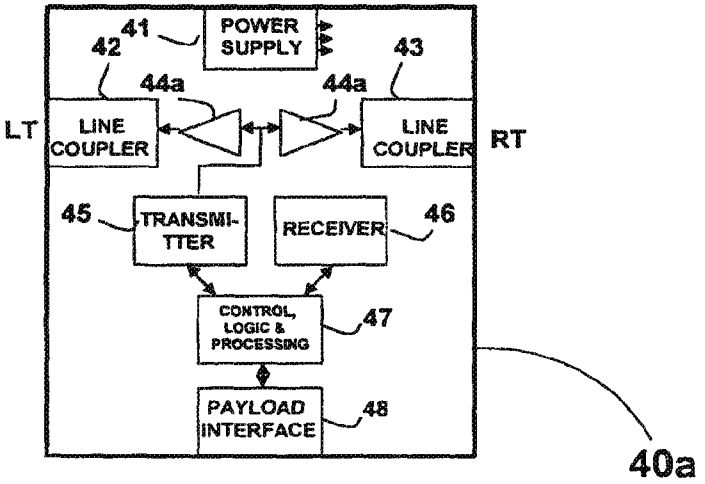

FIG. 5c.

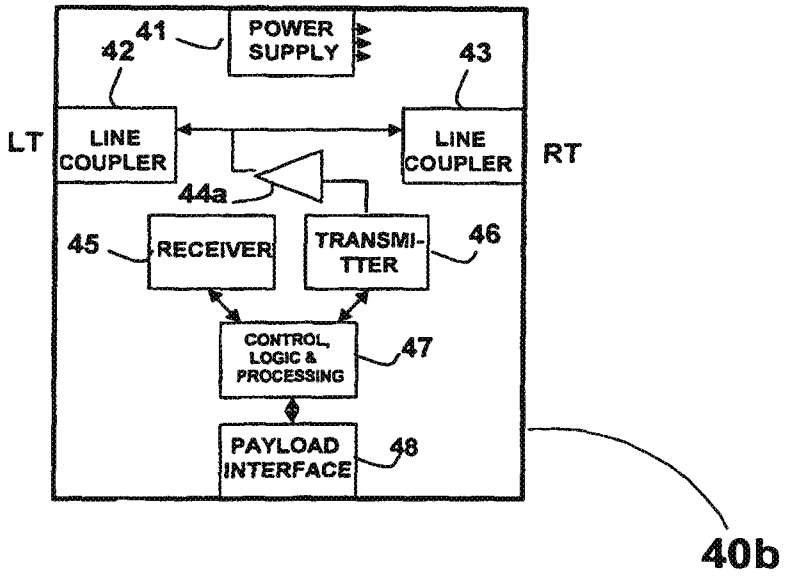
41
POWER SUPPLY
42
43
LT
LINE COUPLER
LINE COUPLER
RT
44a
45
RECEIVER
TRANSMI-TTER
46
CONTROL, LOGIC & PROCESSING
47
PAYLOAD INTERFACE
48
40b

FIG. 5d.

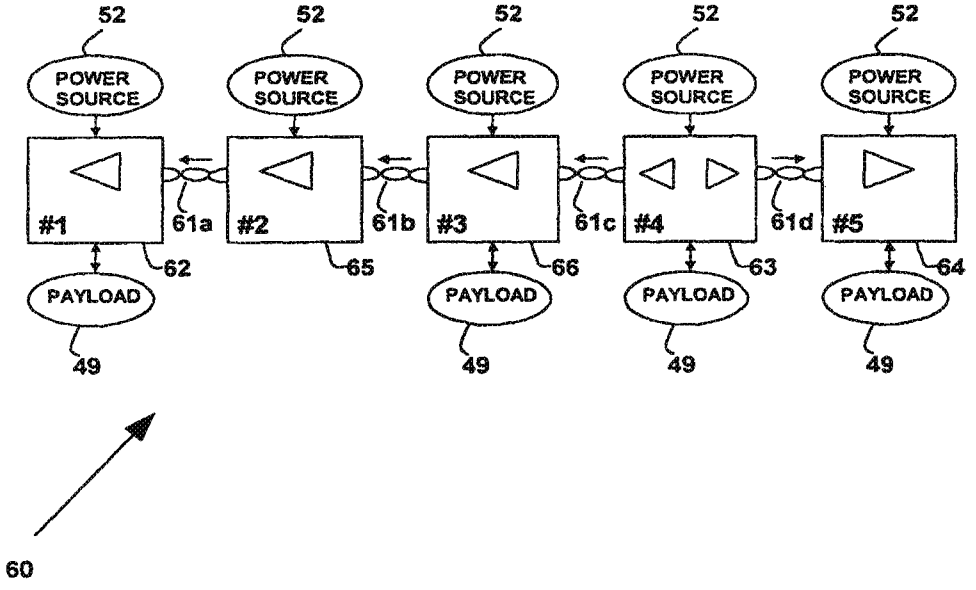
52
POWER SOURCE
#1
#2
#3
#4
#5
61a
61b
61c
61d
62
65
66
63
64
PAYLOAD
49
60

FIG. 6.

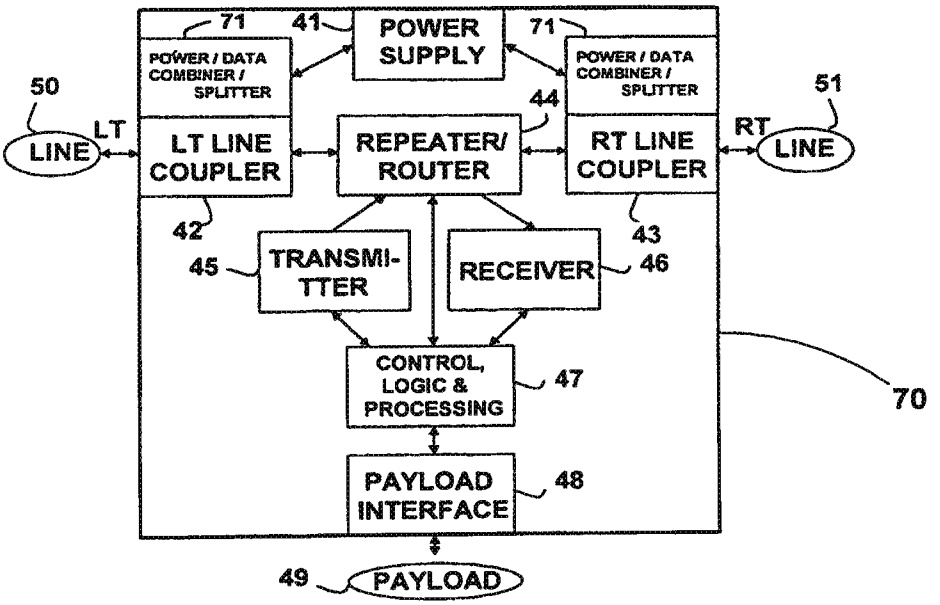
71
41
POWER SUPPLY
71
POWER / DATA COMBINER / SPLITTER
POWER / DATA COMBINER / SPLITTER
50
LT
LINE
LT LINE COUPLER
REPEATER/ ROUTER
44
RT LINE COUPLER
RT
LINE
51
42
43
45
TRANSMI-TTER
RECEIVER
46
CONTROL, LOGIC & PROCESSING
47
70
PAYLOAD INTERFACE
48
49
PAYLOAD

FIG. 7.

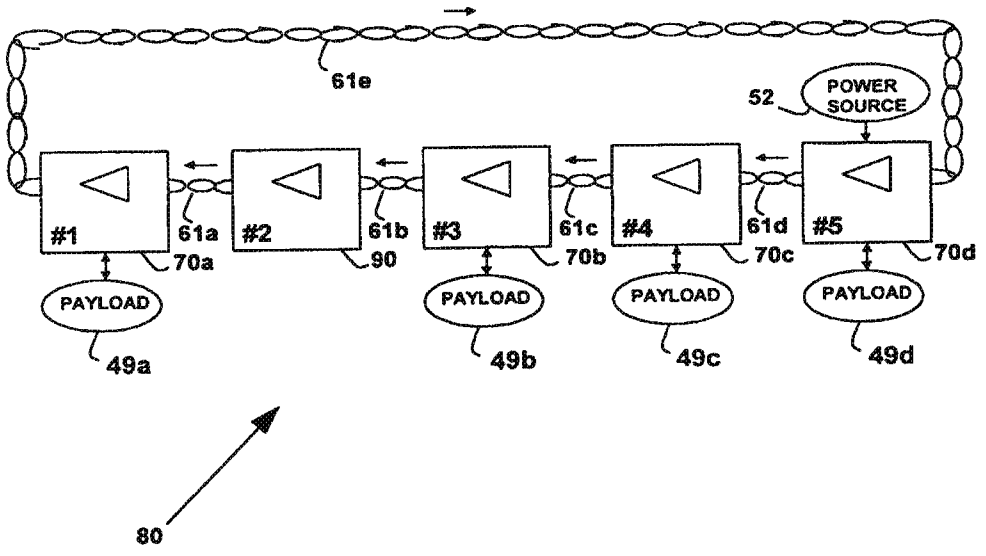
61e
52
POWER SOURCE
#1
61a
#2
61b
#3
61c
#4
61d
#5
70a
90
70b
70c
70d
PAYLOAD
PAYLOAD
PAYLOAD
PAYLOAD
49a
49b
49c
49d
80

FIG. 8.

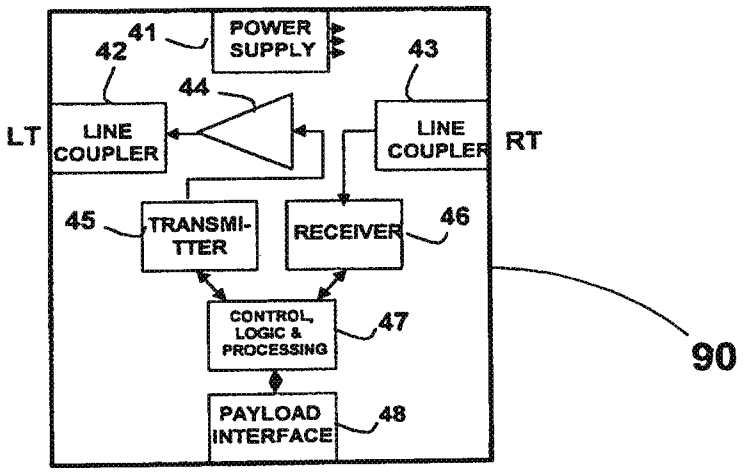
41
POWER SUPPLY
42
43
44
LT
LINE COUPLER
LINE COUPLER
RT
45
TRANSMI-TTER
RECEIVER
46
CONTROL, LOGIC & PROCESSING
47
90
PAYLOAD INTERFACE
48

FIG. 9a.

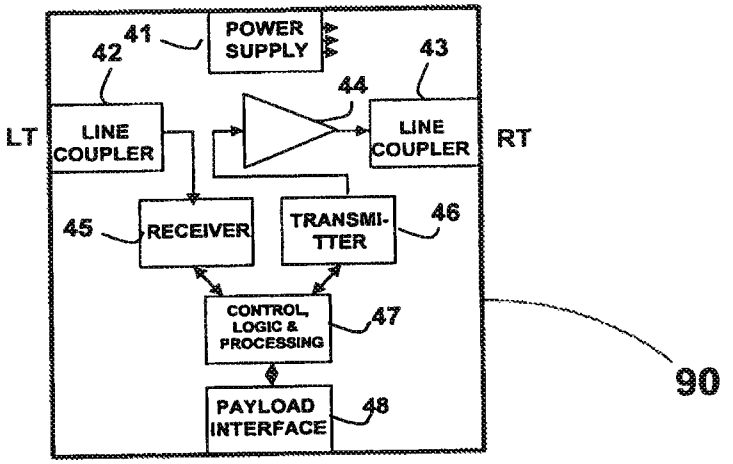
41
POWER SUPPLY
42
43
44
LT
LINE COUPLER
LINE COUPLER
RT
45
RECEIVER
TRANSMI-TTER
46
CONTROL, LOGIC & PROCESSING
47
90
PAYLOAD INTERFACE
48

FIG. 9b.

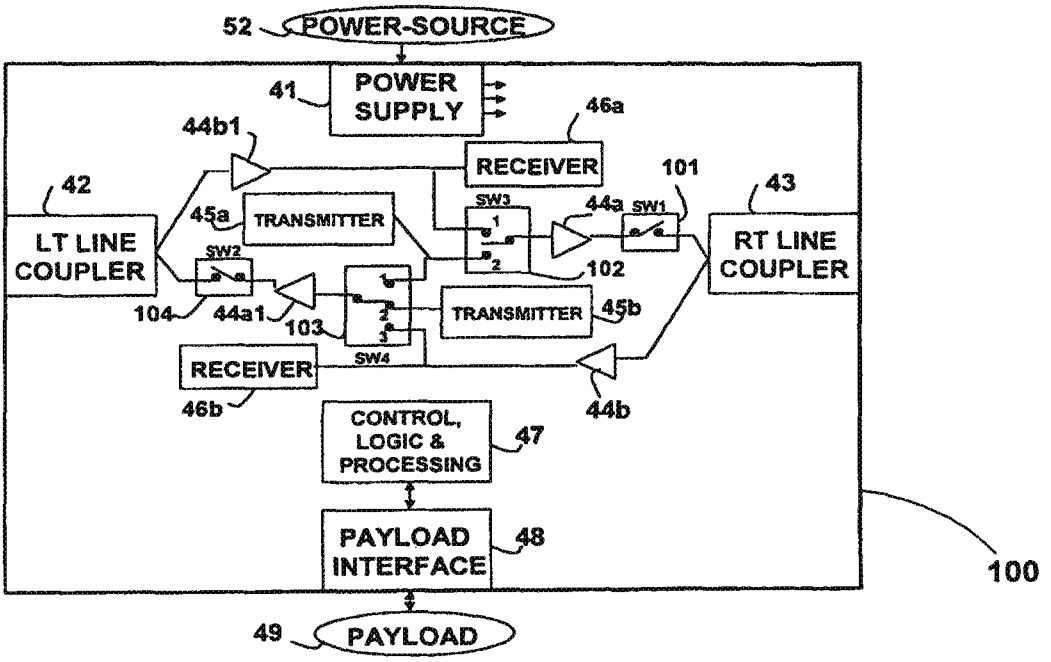
52
POWER-SOURCE
41
POWER SUPPLY
44b1
46a
RECEIVER
101
42
LT LINE COUPLER
45a
TRANSMITTER
SW3
44a
SW1
43
RT LINE COUPLER
SW2
102
104
44a1
103
TRANSMITTER
45b
RECEIVER
SW4
46b
44b
CONTROL, LOGIC & PROCESSING
47
PAYLOAD INTERFACE
48
100
49
PAYLOAD

FIG. 10.

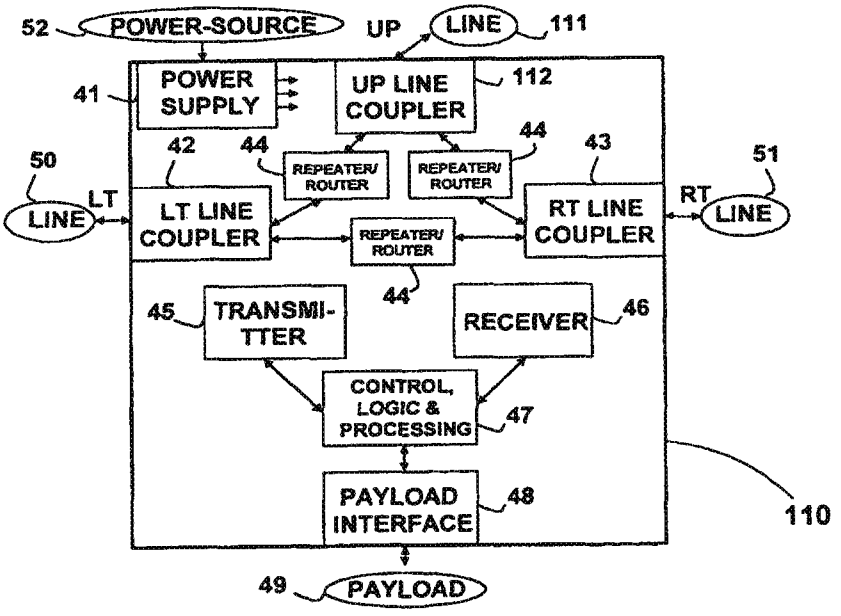
52
POWER-SOURCE
UP
LINE
111
41
POWER SUPPLY
UP LINE COUPLER
112
42
44
REPEATER/ ROUTER
44
REPEATER/ ROUTER
43
50
51
LT LINE
LT LINE COUPLER
REPEATER/ ROUTER
RT LINE COUPLER
RT LINE
44
45
TRANSMI-TTER
RECEIVER
46
CONTROL, LOGIC & PROCESSING
47
PAYLOAD INTERFACE
48
110
49
PAYLOAD

FIG. 11.

Node State	SW1	SW2	SW3	SW4
Right-to-left	OFF	ON	Don't Care	3
Left-to-right	ON	OFF	1	Don't Care
Transmit both sides	ON	ON	2	1
Receive both sides	OFF	OFF	Don't Care	Don't Care
Transmit right Receive left	ON	OFF	2	Don't Care
Transmit left Receive right	OFF	ON	Don't Care	2
Transmit/receive both sides	ON	ON	2	2

FIG. 12.

LOCAL AREA NETWORK FOR DISTRIBUTING DATA COMMUNICATION, SENSING AND CONTROL SIGNALS

This is a continuation of parent application Ser. No. 11/438,259, filed May 23, 2006, itself a division of application Ser. No. 11/190,884, filed Jul. 28, 2005, now U.S. Pat. No. 7,200,152, issued Apr. 3, 2007, itself a continuation of application Ser. No. 09/349,020, filed Jul. 7, 1999, now U.S. Pat. No. 6,956,826, issued Oct. 18, 2005.

FIELD OF THE INVENTION

The present invention relates to the field of wired communication and control networks, and, more particularly, to local area networks and networks used for sensing, communication, and control.

BACKGROUND OF THE INVENTION

Local area networks (LANs) for distributing data communication, sensing, and control signals are often based on a "bus" topology, as shown in FIG. **1**. Such a network **10** relies, on shared electrically-conducting communication media **1**, usually constituted by a twisted-pair of electrical conductors or a coaxial cable. Network data terminal equipment (DTE) units **5**, **6**, and **7** are connected via respective network adapters **2**, **3**, and **4** to communication media **1**. Network adapters **2**, **3**, and **4** function as data communication equipment (DCE) units, and are tapped into communication media **1**, forming parallel electric connections, and thereby interface between DTE units **5**, **6**, and **7** and communication media. Such network adapters are also commonly referred to as "NIC", an example of which is the Network Interface Card IEEE 802 (Ethernet). Such a topology is commonly used for connecting personal computers (PCs) in a network. Network adapters can be stand-alone units, integrated into the DTE unit or housed therewith in a common enclosure.

Control networks, interconnecting sensors, actuators, and DTE's also commonly use the same topology, such as the network described in U.S. Pat. No. 4,918,690 (Markkula, Jr. et al.) and shown in FIG. **2**. In a network **20**, network adapters **22**, **23**, and **24** function as DCE's, but are commonly referred to as "nodes". The payloads **25**, **26**, and **27** are composed of sensors, actuators, and DTE's.

Hereinafter, the term "node" is used for both control and data-communication applications.

A topology (such as bus topology) whose physical layer communication media employs multi-point connections, is not optimal for communication, and exhibits the following drawbacks:

1. The maximum length of the communication media is limited.
2. The maximum number of units connected to the bus is limited.
3. Complex transceivers are required in order to interface the communication media.
4. The data rate is limited.
5. Terminators are required at the communication media ends, thus complicating the installation.
6. At any given time, only single connected unit may transmit; all others are receiving.
7. In case of short circuit in the bus, the whole network fails. Localizing the fault is very difficult.

Despite these drawbacks, however, bus topology offers two unique advantages:

1. If the application requires "broadcast" data distribution, where the data generated by a given node must be distributed to all (or a majority of) the nodes in the network, network operation is very efficient. This is because only a single network operation is required (i.e., to establish which node is the transmitter). The broadcast data is received by all other nodes in the network in parallel without additional network overhead.
2. The broadcast message is received simultaneously by all receiving nodes in the network. This is important in real-time control applications, for example, where orderly operation of the units must be maintained.

The communication-related drawbacks described above are solved by networks constructed of multiple communication links, wherein each instance of the link communication media connects only two units in the network. Here, the physical layer in each segment is independent of other links, and employs a point-to-point connection. Data and/or messages are handled and routed using data-link layer control. One example of such system for LAN purposes is the Token-Ring, described in the IEEE 802 standard. An example of a corresponding control network is described in U.S. Pat. No. 5,095,417 to Hagiwara et al. Both networks use circular topology ("ring topology") as illustrated in FIG. **3**. A network **30** interconnects nodes (or NIC's) **32**, **33**, and **34** by three separate cables **31**A, **31**B, and **31**C, each connecting a pair of nodes and forming three distinct physical layer communication links. Payloads (or DTE's) **35**, **36**, and **37** are respectively connected to the appropriate nodes.

Both the Hagiwara network and the Token-Ring network use unidirectional communication in each communication link and require a circular topology. The PSIC network described in U.S. Pat. No. 5,841,360 to the present inventor teaches a similar network where the use of a circular topology is optional, and bi-directional communication (either half-duplex or full-duplex mode) is employed in the communication links.

The above-mentioned prior art patents and networks are representative only. Certain applications are covered by more than one issued patent. Additional discussion concerning the above-mentioned topologies can be found in U.S. Pat. No. 5,841,360 entitled. "Distributed serial control system" which issued Nov. 24, 1998 and co-pending U.S. patent application Ser. No. 09/123,486 filed Jul. 28, 1998, both in the name of the present inventor, and incorporated by reference for all purposes as if fully set forth herein.

Networks such as those illustrated in FIG. **3** typically use a "store and forward" mechanism, wherein the data received at a specific node is decoded at least to the data-link layer, and then re-encoded and transmitted to another point in the network as determined by the network control. This use of point-to-point communication links eliminates the communication drawbacks enumerated above in broadcast-based networks, but it lacks the two unique advantages of the broadcast technology, as also previously enumerated. Because the data is not inherently distributed throughout a network based solely on point-to-point communication links, such a network incurs a heavy overhead when broadcast is needed and exhibits delays in the propagation of messages. The overhead and delays result from the need to decode and re-encode messages at each node.

There is thus a widely-recognized need for, and it would be highly advantageous to have, a means of implementing a network which allows for both improved communication

characteristics, while also supporting broadcast discipline and fast message distribution along the network.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a local area network in which at least some of the drawbacks described above are reduced or eliminated.

To this end, the present invention provides a local area network based on nodes connected to payloads. The nodes are interconnected to form a network of half-duplex or full-duplex communication links based on electrically conducting communication media such as twisted conductor pairs or coaxial cables. Each communication link interconnects two nodes in the network. Each node is capable of being dynamically configured as a transmitter or as a receiver. In addition, however, each receiving node can also be dynamically configured to be a repeater, which simply retransmits the received data. In this way, data from one link can be repeated to all other links via an automatic multicast process. In normal operation, a specific node is selected as the data generating unit to transmit data to the network. All other nodes serve as repeaters and receivers, and hence the data is multicast instantaneously from the selected data generating node throughout the network. After completing this transmitting session, another node may be selected as the data generating node, with all other nodes serving as repeaters and receivers in a like fashion.

A network according to the present invention can also be configured in a circular topology, enabling operation to continue even when there is a malfunction or loss of a communication link.

Therefore, according to the present invention there is provided a local area network for distributing data communication, sensing, and control signals, the local area network including at least three nodes having an operational mode and interconnected by at least two distinct communication links according, to a topology, wherein: (a) each of the communication links has at least two electrical conductors; (b) each of the communication links connects two of the nodes in a point-to-point configuration; (c) each of the communication links is operative to communicating in a half-duplex mode; (d) at least one of the nodes is connected to a payload; (e) at least two of the nodes have the operational mode selectable as a data-generating operational mode; (f) at least one of the nodes has the operational mode selectable as a repeating operational mode; and wherein the local area network has a state selectable from a group of at least two distinct states, wherein each state, is characterized by having a single selected one of the nodes in the data-generating operational mode, with the remainder of the nodes in operational modes selected from a group containing the receiving operational mode and the repeating operational mode.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, some preferred embodiments will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

FIG. **1** shows a prior-art LAN for data communication, employing bus topology.

FIG. **2** shows a prior-art LAN for control, employing bus topology.

FIG. **3** shows a prior-art network for control or data-communication, employing circular topology.

FIG. **4** describes a general block diagram of a node according to the present invention.

FIGS. **5***a*, **5***b*, **5***c*, and **5***d* show different possible states of a node according to the present invention.

FIG. **6** shows a state of a network according to the present invention.

FIG. **7** shows a general block diagram of a node according to the invention, wherein power is also carried by the network.

FIG. **8** shows a state of a network according to the present invention, wherein power is carried by the network and employing circular topology.

FIGS. **9***a* and **9***b* show different possible states of a node in circular topology network according to the present invention.

FIG. **10** shows a block diagram of a node according to a preferred embodiment.

FIG. **11** shows a block diagram of a node according to the present invention, supporting three line couplers.

FIG. **12** describes various possible node states, and the respective required switches states for a node as shown in FIG. **10**.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The principles and operation of a network according to the present invention may be understood with reference to the drawings and the accompanying description. The drawings and descriptions herein are conceptual only. In actual practice, a single circuit can implement one or more functions; alternatively, each function can be implemented by a plurality of components and circuits. In the drawings and descriptions, identical reference numerals indicate those components that are common to different embodiments or configurations.

FIG. **4** schematically shows a node **40** according to the present invention. Node **40** contains the following functional blocks:

- A power supply **41**, fed from a power source **52**, which converts incoming power to the voltage, or voltages, required by the node and the node's components. In addition, power supply **41** may also feed a payload **49** connected to node **40**. If used, this feeding function is carried out by a payload interface **48**. (For clarity, FIG. **4** omits the individual connections distributing power from power supply **41** to the power-consuming blocks of node **40**.)
- A payload interface **48** which adapts node **40** to a specific payload **49**. Various payload types can be employed, such as sensors, actuators and data units, either analog or digital, functioning either as output or as input. For example:
  - Analog sensor. The payload consists of analog sensor used to measure any physical phenomena. In most cases, the payload interface contains an A/D converter.
  - Digital sensor. The payload is a switch, button, etc.
  - Analog actuator. In most cases, the payload contains a D/A converter controlling the parameters of the analog actuator.
  - Data related unit. In the case of digital communication, the payload consists of DTE and the payload interface contains a DTE interface.
  - Non-digital data. Data such as video, voice, analog communication or any other of data type. If analog data is input to the node, the payload interface is likely to use an A/D converter. The above examples are not intended to limit in any way the general payload definition. Furthermore, multiple devices of various types

can be used. In some cases, payload **49** may use power from node **40**. For example, the excitation voltage to analog sensor may be driven from the node power.

Some nodes in the network may not be connected to a payload, or may not have any payload interface at all. Nodes configured in this manner would be used as repeaters only, such as a node **90** in FIG. **8**. Repeater nodes can be used, for example, to extend the distance between nodes beyond the regular limit.

Line couplers **42** and **43**, which interconnect node **40** with up to two other nodes, each via communication media **50** and **51**, respectively (also referred to as "lines"). Each communication media supports communication between two nodes of the network. For clarity only, the two ports are designated 'Left'-LT and 'Right'-RT. The right connection RT uses, line **51** and connects via RT line coupler **43**. Similarly, the left connection LT uses line **50** and connects via LT line coupler **42**. Neither line coupler **42** nor line coupler **43** affects the communication signal. Line couplers may include connectors, protection devices, isolation (e.g. transformer) and other required functions, which, are not normally associated with the communication signal itself.

A transmitter **45**, which deals with the data to be transmitted, except for the physical layer functions (according to the OSI interconnection model). This block can be implemented in hardware (CRC generation circuitry, for example) by software, or by both hardware and software.

A receiver **46**, which deals with the received data, except for the physical layer functions (according to the OSI interconnection model). This block can be implemented in hardware (CRC error detection circuitry, for example), by software, or by both hardware and software.

A control, logic, and processing unit **47**, which controls and monitors node **40** and network operation. This block interconnects with the controlled blocks in node **40** (for clarity, some lines are omitted from FIG. **4**). In addition, control, logic, and processing unit **47** can process data in the network, and also deals with the payload via payload interface **48**. Control, logic, and processing unit **47** is furthermore in charge of shifting a repeater/router **44** from one state to another, as detailed below.

Repeater/router **44** deals with the physical layer characteristics of the communication signal. The repeater/router can be in various states, including a receive-only state and a transmit-only state. The signal is encoded and decoded, and is routed according to the control signals from control, logic, and processing unit **47**. Detailed explanation of the repeater/router **44** follows.

A node can be stand-alone or integrated into the payload. For example, in the case of personal computer, the node can be housed within the computer enclosure as an add-on card.

FIGS. **5***a* and **5***b* describe the various repeater/router functions by means of the possible states of a repeater/router during normal operation. As shown in FIG. **5***a*, repeater/router **44** contains two units connected in series. A line receiver **44***b* decodes the communication signal in the line into a digital signal which is fed to receiver **46** for analyzing the data-link and higher OSI layers. The digital signal is then fed to a line driver **44***a* which encodes the communication signal again. The pair consisting of line receiver **44***b* and line driver **44***a* thus form a communication signal repeater which performs a transparent routing of the communication signal from 'left' to 'right'. The delay between input and output is negligible, in the order of nano-seconds or micro-seconds.

Similarly, FIG. **5***b* allows for a routing from 'right' to 'left'. The direction of repeater/router **44** is controlled by control, logic, and processing unit **47**, via control lines (omitted for clarity from FIG. **5**).

Whereas FIGS. **5***a* and **5***b* describe a node which does not generate any data (but only receives and transfers the data in the network), FIGS. **5***c* and **5***d* illustrate nodes in the transmitting state. In both cases, the node transmits data to both the right and left connections via the respective line coupler. In FIG. **5***c*, two line drivers **44***a* are used, one for each direction. In FIG. **5***d*, a single line driver **44***a* is used, driving both directions from a single unit. Both embodiments can be used interchangeably. In most cases, the line driver and line coupler characteristics will be the basis for selecting one configuration in preference over the other. For example, if the line driver is capable of driving a single line only, the configuration of FIG. **5***c* should be used.

FIG. **6** shows a network **60** according to the present invention. Electrically-conducting communication media of lines **61***a*, **61***b*, **61***c*, and **61***d* are used to interconnect the nodes. At least two conductors are used in the communication media. For example, coaxial cables or copper twisted-pairs may be used. For clarity only, the figures herein illustrate the use of a single twisted-pair in non-limiting examples.

Nodes **62**, **63**, **64**, **65** and **66** are all the based on node **40** as described previously. Nodes **62**, **65**, and **66** are, in 'Right to Left' state as illustrated in FIG. **5***b*, whereas node **64** is in 'Left to Right' state, as illustrated in FIG. **5***a*. Node **63** is the data generating node as in FIGS. **5***c* and **5***d*. The network in FIG. **6** shows one possible state of the network, wherein node **63** is the data-generating node, while all other nodes serve as receivers and repeaters, receiving the data and re-transmitting the data to the next sequential node. In order to support dynamic reconfiguration, nodes can simultaneously have more than one operational mode. In a non-limiting fashion, a node can have:

- a data-generating operational mode, wherein a node functions as a source of data, and transmits this data to other nodes;
- a receiving operational mode, wherein the node receives data from, another node; and
- a repeating operational mode, wherein the node functions as a repeater of data received from one given node by re-transmitting this data to another given node.

While the network is functioning, the current operational mode of a node is selectable from the available operational modes. Some operational modes may be mutually exclusive, while others may be selected simultaneously. For example, the data-generating operational mode is exclusive of the repeating operational mode, whereas the receiving operational mode may be selected at the same time as the repeating operational mode.

In most applications, more than one node can serve as a data-generating node at different times. In such a case, the network states will be changed as a function of time according to predetermined logic and control, in order to allow each data generating node an opportunity to transmit. However, no more than a single node can serve as data-generating node at a time. While a node is serving as data-generating node, all other nodes states are accordingly set to be repeaters and/or receivers, to allow for data distribution along the network. Nodes located 'left' of the data generating node will be in a 'right to left' state, while nodes located 'right' of the data-generating node will be in a 'left to right' state.

It should be clear that, whereas the nodes at the network ends, the 'left-most' node **62** and the 'right-most' node **64** could use the same structure as shown in FIG. **4** (and can be

implemented in the same way as all other nodes in the network), the end nodes utilize only single line connection. Thus, these end nodes can be implemented using a single line coupler and single line driver.

It should also be clear that one or more of the nodes in the network need not be connected to a payload, as is illustrated for node **65** in FIG. **6**. This may be the case where the attenuation in the line is too high (e.g. a line is too long), and a node serves mainly as a repeater. In such a case, payload interface **48** would not be required.

Network Powering.

FIG. **6** illustrates a network wherein each node is locally powered by a local power source **52**, which supplies electrical power for, operating the components of the network. Alternatively, the network communication media can be used for power distribution. In one embodiment of the present invention, the power is distributed via dedicated lines, such as by the use of two additional wires within the same cable. In a preferred embodiment, the same wires can be used for both data communication and power distribution. The latter configuration is described in co-pending U.S. patent application Ser. No. 09/141,321, filed by the present inventor on Aug. 27, 1998, which is applicable to the network discussed herein and incorporated by reference. FIG. **8** illustrates such a network, allowing for single power-supply to be used for powering the whole network.

When the same wires are used for both communication and power, the node **40** should be modified to include a power/data combiner/splitter **71** as shown in FIG. **7**. A node **70** is shown with two power/data combiner/splitters **71** coupled to line couplers **42** and **43**. A node such as node **70** can receive power from either the left or the right sides or from both sides, and carry the power to the non-powered side. Being powered from the network, no power source interface will be usually supported for such a configuration. The power source feeding the network can connect thereto via dedicated couplers or via one or more of the nodes, modified to support such capability.

Circular Topology.

While the foregoing description applies the present invention to a linear topology, the present invention can also be implemented using a circular topology for 'ring' type networks. In one embodiment, both ends of the network are connected to a node which is configured to receive from both sides, hence including two receivers. However, FIG. **8** shows a preferred embodiment of a network **80**. In network **80**, all nodes except the data-generating node are configured to the transparent repeater state, either uniformly 'right-to-left' or uniformly 'left-to-right'. A node **90** in the data-generating state is modified as illustrated in FIGS. **9***a* and **9***b*. Node **90** can transmit to one side and receive from the other. In FIG. **9***a* node **90** can transmit to the left side and receive from the right side. Similarly, in FIG. **9***b* node **90** can transmit to the right side and receive from the left side. Either state can be used in circular topology. In FIG. **8**, node **90** is in the state shown in FIG. **9***a*. Alternatively, node **90** can be in the state shown in FIG. **9***b*. All other nodes of FIG. **8** are, configured in the 'right-to-left' direction. In both cases, the data-generating node **90** transmits to one side and receives from the other. The receiving functionality of node **90** can be used for monitoring the network, to insure that the data path is available and is error-free. However, this receiver functionality is an option only, and does not have to be implemented.

For compactness, FIG. **8** demonstrates both the power feeding via the network and the circular topology together, but these features are independent and may be implemented separately.

Network Control.

As described above, the operation of the network (either bus or circular topology) switches from state to state. Each state is characterized by having a specific node functioning as data-generating node at a time, while all other nodes serve as repeaters and receivers, routing the data coming from the data-generating node. Hence, there is a need for a network controller to determine which node in the network will be the data-generating node.

Various techniques can be used to implement such a network controller. The network controller can select nodes sequentially, by means of token passing from node to node (similar to that of the Token-Ring network). The network controller can be external to the network, using dedicated communication media. Preferably, the network controller will be embedded and will manage the network states via signals transported by the network itself. In most cases, each node should be allocated an address, enabling data routing in the network from arbitrary node to arbitrary node.

Another popular method of network discipline is 'master/slave' operation. In another embodiment of the present invention, one of the nodes will be designated as the master node. In the initial state, this node serves as the data-generating node, and while in this state directs other nodes to transmit. During the following state the selected node will serve as the data-generating node. This two-state sequence will be repeated, with a different node selected to be the data-generating node in each subsequent cycle, according to predetermined logic or under external control.

Dual Discipline Network.

The network taught by U.S. Pat. No. 5,841,360 to the present inventor, herein referred to as the "PSIC Network", employs multiple communication links, independent of each other. Such a network supports several features which are not available in the previously-described network, such as automatic addressing, fault localization, and circular topology redundancy in the case of single failure.

In order to exploit the benefits of both these network types it is possible to construct a network which supports both disciplines, and can be controlled to be either in one discipline or in the other. For example, the network may start as PSIC Network. During this start-up period, automatic addressing and fault localization will be performed. Thereafter, the network may configure itself to work according to this application or may use time-sharing and alternately switch between both configurations.

FIG. **10** shows a schematic view of a node **100** which is capable of both roles. The state of node **100** is determined by switches **101**, **104**, **102**, and **103**, designated SW**1**, SW**2**, SW**3** and SW**4** respectively. These switches are controlled by control, logic, and processing unit **47**. Node **100** employs transmitters **45***a* and **45***b*, as well as receivers **46***a* and **46***b*. Line driver **44***a* serves the right port, while line driver **44***a***1** serves the left connection. Similarly, line receivers **44***b* and **44***b***1** are connected to the right and left interfaces respectively.

FIG. **12** lists the various possible node states for node **100** (FIG. **10**). The states in FIG. **12** are given in a Node State column, and the switch settings are given in SW**1**, SW**2**, SW**3**, and SW**4** columns. In a 'Right-to-left' state, data received in the right port is handled by line receiver **44***b* and fed to line receiver **46***b*. Simultaneously, the received data is fed to line driver **44***a***1**, which transmits to the left side. Thus, the functionality shown in FIG. **5***b* is obtained. In a similar way, the 'Left-to-right' state is implemented to achieve a functionality as shown in FIG. **5***a*. In the latter case, line receiver **46***a* is the active one.

In the 'transmit both sides' state, transmitter **45***a* transmits to both ports using line drivers **44***a* and **44***a***1**, implementing the functionality shown in FIG. **5***c*. In the 'receive both sides' state, each receiver is connected to single line coupler, and no line driver is activated. This is expected to be the state when the network is idle or as an interim state while switching between states, in order to avoid data collisions caused by two or more transmitters active over the same link.

The 'transmit right receive left' state reflects the state shown in FIG. **9***b*. Similarly, the 'transmit left receive right' state reflects, the functionality shown in FIG. **9***a*.

In the 'transmit/receive both sides' state, the node can receive and transmit in both interfaces simultaneously, thus implementing the full PSIC Network functionality.

Nodes with More than Two Line Connections

Whereas the foregoing discussion describes a node having two line couplers (which may be reduced to single interface in the case of an end-unit in a network employing 'bus' topology), it is obvious that three or more such interfaces could also be used. In such a case, at least one additional repeater/router must be added for each additional interface. For example, FIG. **11** illustrates a node **110** having three interfaces, where an additional interface is designated as 'up', and uses a line coupler **112** for interfacing to a line **111**. In order to support the interconnection between all three ports, three repeater/router units **44** are used, each constructed as described previously and suitable for connecting two ports. In some applications, where the connectivity requirements can be reduced, any two out of the three ports may be used.

Similarly, additional interfaces can be used. Furthermore, a network can employ nodes of different interface capacities, which can be freely connected to construct a network of arbitrary topology. In all, cases, the basic rule that each communication link connect only two nodes must be observed. Furthermore, the network logic embedded in the nodes has to insure that no more than a single node generates data, while all others must be in the transparent repeater/router state, directed from the data-generating node.

Implementation.

Implementing any of the above schemes is straightforward for anyone skilled in the art. In one embodiment, RS-485 (EIA-485) is employed for the physical layer. In such a case, line driver **44***a* and line receiver **44***b* are directly implemented using a common RS-485 line driver or line receiver, respectively. Similarly, the switches illustrated in FIG. **10** can be implemented using manually-activated switches, relays, analog switches, or digital switches/multiplexers. Except in the case of manual switches, switching is controlled electronically.

Repeaters and regenerators are known in both prior-art WAN (Wide Area Network) and LAN (Local area network) systems, mainly for the purpose of allowing operation over lengthy connections. However, there are major differences between those networks and the present invention. First, most prior-art repeaters employ single input and single output. The present invention allows for multiple ports. Second, prior-art repeaters are unidirectional, while the present invention is not restricted to a specific direction of data flow. Additionally, the present invention requires a control mechanism (a network controller) for determining the data flow direction, whereas prior-art systems, being unidirectional, do not require such control. In most prior-art networks, units in the network can be clearly defined as either payload-associated units or dedicated repeaters. Such a distinction is not valid when implementing a network according to the present invention, since, each payload-associated unit in the network also includes the repeater functionality.

Although a network according to the present invention, when configured in circular topology, can be superficially similar to a Token-Ring network, there are major differences between them. In a Token-Ring network, there is a single constant direction of data flow. The present invention does not impose single direction of data flow, but the flow may change as part of the network operation. In addition, in Token-Ring networks the data-generating unit is sequentially allocated according to the network topology. In the present invention, the data-generating node need not be chosen according to any specific rule, although sequential selection of the data-generating node is possible.

While the invention, has been described with respect to a limited number of embodiments, it will be appreciated that many variations, modifications and other applications of the invention may be made.

What is claimed is:

1. A device for coupling a video signal onto, and for being powered from, a Local Area Network (LAN) cable concurrently carrying a power signal and a serial digital data signal over said LAN cable in a full-duplex communication, the device comprising:

a LAN connector for connecting to the LAN cable;

a video port for receiving a video signal;

a LAN transceiver for communication in a full-duplex serial digital data signal over said LAN cable, the LAN transceiver being coupled between said LAN connector and said video port for transmitting the video signal in said serial digital data signal;

a firmware and a processor executing said firmware, wherein said processor is coupled to said LAN transceiver for controlling said LAN transceiver;

a power supply for voltage conversion coupled to said LAN transceiver and powered only from said power signal, the power supply connected for powering said LAN transceiver and said processor;

a single enclosure housing said LAN connector, said video port, said LAN transceiver, said firmware and said processor; and

a power/data splitter having first, second and third ports, said splitter being configured so that only the power signal is passed from said first port to said second port, and only the digital data signal is passed between said first and third ports, and wherein said power/data splitter is connected between said LAN transceiver, said power supply and said LAN connector, wherein said first port is coupled to said LAN connector; said second port is coupled to said power supply; and said third port is coupled to said LAN transceiver,

wherein said device is addressable in the LAN.

2. The device according to claim **1**, wherein said device has a manually assigned address.

3. The device according to claim **1**, wherein said device has an automatically assigned address.

4. The device according to claim **3**, wherein said device has an address assigned by a data unit coupled via the LAN.

5. The device according to claim **1**, wherein said communication over said LAN cable is a point-to-point communication.

6. The device according to claim **5**, wherein said LAN transceiver is operative for communication with a single mating LAN transceiver of the same type over said LAN cable.

7. The device according to claim **6**, wherein said communication over said LAN cable is packet based.

8. The device according to claim **7**, wherein said communication over said LAN cable is Ethernet-based.

9. The device according to claim 1, wherein said video port is a video connector.

10. The device according to claim 9, wherein said video port is an analog video connector.

11. The device according to claim 1, wherein the power signal is carried over said LAN cable using dedicated wires.

12. The device according to claim 1, wherein said video signal is an analog video signal, and wherein said device further comprises an analog to digital converter coupled between said video port and said LAN transceiver for converting the analog video signal to a digital form.

13. The device according to claim 1 further operative for sensing a physical phenomenon, wherein the device further comprises an analog port for coupling to receive an analog signal from an analog sensor for sensing the physical phenomenon, and said device further comprises an analog to digital converter coupled between said analog port and said LAN transceiver for converting the analog signal to a digital signal for transmission in said serial digital data signal.

14. The device according to claim 13, wherein the analog sensor is an audio device, said analog signal is an analog audio signal, and said digital signal contains digitized audio.

15. The device according to claim 14, wherein said analog port is an analog connector.

16. The device according to claim 14, wherein said analog port is an analog audio connector.

17. The device according to claim 14, wherein said analog port is further coupled to said power supply for powering the analog sensor from said power signal.

18. The device according to claim 1 further operative for producing a physical phenomenon, wherein the device further comprises an analog port for coupling an analog signal to an analog actuator for producing the physical phenomenon, and wherein said device further comprises a digital to analog converter coupled between said analog port and said LAN transceiver for converting a digital signal from said serial digital data signal to an analog signal.

19. The device according to claim 18, wherein the analog actuator is an audio device, said analog signal is an analog audio signal, and said digital signal contains digitized audio.

20. The device according to claim 19, wherein said analog port is an analog connector.

21. The device according to claim 20, wherein said analog port is an analog audio connector.

22. The device according to claim 18, wherein said analog port is further coupled to said power supply for powering the analog actuator from said power signal.

23. The device according to claim 1, further comprising in said single enclosure a data port coupled to said LAN transceiver and connectable to a data unit for coupling the data unit to the serial digital data signal.

24. The device according to claim 23 wherein:

the data unit is a wired digital data unit;

said data port comprises a digital data connector connectable to the wired digital data unit; and

said device further comprises a further transceiver coupled between said LAN transceiver and said digital data connector for bi-directional digital data communication with the wired digital data unit.

25. The device according to claim 24 wherein the communication with the wired digital data unit is standard full duplex serial communication.

26. The device according to claim 25 further operative to power the data unit, wherein said data port is coupled to said power supply for powering the connected data unit therefrom.

27. The device according to claim 1 further comprising a transformer connected between said LAN transceiver and said LAN connector for passing said serial digital data signal and for isolating said power signal.

28. The device according to claim 1, wherein the power signal and the digital data signal are carried over said LAN cable using the same wires.

29. A device for coupling an audio signal onto, and for being powered from, a Local Area Network (LAN) cable concurrently carrying a power signal and a serial digital data point-to-point communication signal, the device comprising:

a LAN connector for connecting to the LAN cable;

an audio port for receiving a audio signal;

a LAN transceiver for point-to-point communication in a serial digital data signal over said LAN cable, the LAN transceiver being coupled between said LAN connector and said audio port for transmitting the audio signal in said serial digital data signal;

a firmware and a processor executing said firmware, wherein said processor is coupled to said LAN transceiver for controlling said LAN transceiver;

a power supply for voltage conversion coupled to said LAN transceiver and powered only from said power signal, the power supply connected for powering said LAN transceiver and said processor;

a single enclosure housing said LAN connector, said audio port, said LAN transceiver, said firmware and said processor; and

a power/data splitter having first, second and third ports, said splitter being configured so that only the power signal is passed from said first port to said second port, and only the digital data signal is passed between said first and third ports, and wherein said power/data splitter is connected between said LAN transceiver, said power supply and said LAN connector, wherein said first port is coupled to said LAN connector; said second port is coupled to said power supply; and said third port is coupled to said LAN transceiver,

wherein said device is addressable in the LAN.

30. The device according to claim 29, wherein said device has a manually assigned address.

31. The device according to claim 29, wherein said device has an automatically assigned address.

32. The device according to claim 31, wherein said device has an address assigned by a data unit coupled via the LAN.

33. The device according to claim 29, wherein said communication over said LAN cable in a full-duplex communication.

34. The device according to claim 33, wherein said LAN transceiver is operative for communication with a single mating LAN transceiver of the same type over said LAN cable.

35. The device according to claim 34, wherein said communication over said LAN cable is packet based.

36. The device according to claim 35, wherein said communication over said LAN cable is Ethernet-based.

37. The device according to claim 29, wherein said audio port is an audio connector.

38. The device according to claim 37, wherein said audio port is an analog audio connector.

39. The device according to claim 29, wherein the power signal is carried over said LAN cable using dedicated wires.

40. The device according to claim 29, wherein said audio signal is an analog audio signal, and wherein said device further comprises an analog to digital converter coupled between said audio port and said LAN transceiver for converting the analog audio signal to a digital form.

41. The device according to claim 29 further operative for sensing a physical phenomenon, wherein the device further comprises an analog port for coupling to receive an analog

signal from an analog sensor for sensing a physical phenomenon, and said device further comprises an analog to digital converter coupled between said analog port and said LAN transceiver for converting the analog signal to a digital signal for transmission in said serial digital data signal.

42. The device according to claim **41**, wherein the analog sensor is a video device, said analog signal is an analog video signal, and said digital signal contains digitized video.

43. The device according to claim **41**, wherein said analog port is an analog connector.

44. The device according to claim **41**, wherein said analog port is an analog video connector.

45. The device according to claim **41**, wherein said analog port is further coupled to said power supply for powering the analog sensor from said power signal.

46. The device according to claim **29** further operative for producing a physical phenomenon, wherein the device further comprises an analog port for coupling an analog signal to an analog actuator for producing the physical phenomenon, and wherein said device further comprises a digital to analog converter coupled between said analog port and said LAN transceiver for converting a digital signal from said serial digital data signal to an analog signal.

47. The device according to claim **46**, wherein the analog actuator is a video device, said analog signal is an analog video signal, and said digital signal contains digitized video.

48. The device according to claim **46**, wherein said analog port is an analog connector.

49. The device according to claim **46**, wherein said analog port is an analog video connector.

50. The device according to claim **46**, wherein said analog port is further coupled to said power supply for powering the analog actuator from said power signal.

51. The device according to claim **29**, further comprising in said single enclosure a data port coupled to said LAN transceiver and connectable to a data unit for coupling the data unit to the serial digital data signal.

52. The device according to claim **51**, wherein:

the data unit is a wired digital data unit;

said data port comprises a digital data connector connectable to the wired digital data unit; and

said device further comprises a further transceiver coupled between said LAN transceiver and said digital data connector for bi-directional digital data communication with the wired digital data unit.

53. The device according to claim **52**, wherein the communication with the wired digital data unit is standard full duplex serial communication.

54. The device according to claim **53** further operative to power the data unit, wherein said data port is coupled to said power supply for powering the connected data unit therefrom.

55. The device according to claim **29** further comprising a transformer connected between said LAN transceiver and said LAN connector for passing said serial digital data signal and for isolating said power signal.

56. The device according to claim **29**, wherein the power signal and the digital data signal are carried over said LAN cable using the same wires.

* * * * *